

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE  
 in its capacity as elected Office

Date of mailing (day/month/year) 03 April 2001 (03.04.01)	
International application No. PCT/GB00/02769	Applicant's or agent's file reference A25807 WO
International filing date (day/month/year) 19 July 2000 (19.07.00)	Priority date (day/month/year) 19 July 1999 (19.07.99)
Applicant O'NEILL, Alan, William et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

26 January 2001 (26.01.01)

☐ in a notice effecting later election filed with the International Bureau on:
2. The election ☒ was
☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer S. Mafla Telephone No.: (41-22) 338.83.38
---	--

# PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>A25807 WO</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/GB 00/ 02769</b>	International filing date (day/month/year) <b>19/07/2000</b>	(Earliest) Priority Date (day/month/year) <b>19/07/1999</b>
Applicant  <b>BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

### 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established by this Authority to read as follows:

**ROUTING IN A PACKET SWITCHING NETWORK WITH MOBILE TERMINALS**

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☐ as suggested by the applicant.

☒ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

8

☐ None of the figures.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT 00/02769

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 H04L29/06 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	COHEN D ET AL: "IP ADDRESSING AND ROUTING IN A LOCAL WIRELESS NETWORK" PROCEEDINGS OF THE CONFERENCE ON COMPUTER COMMUNICATIONS (INFOCOM), US, NEW YORK, IEEE, vol. CONF. 11, page 626-632 XP000300088 ISBN: 0-7803-0602-3 page 0626, right-hand column, paragraph 4 -page 0627, left-hand column, paragraph 2 page 0627, right-hand column, paragraph 4 -page 0628, left-hand column, paragraph 1 page 628, right-hand column, paragraph 5 -page 629, left-hand column, paragraph 2 page 0629, left-hand column, paragraph 4 -right-hand column, paragraph 1 ---	1-6, 8-11, 13
A	---	7, 12, 14, 20, 22
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

30 November 2000

Date of mailing of the international search report

07/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Blanco Cardona, P

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/ 00/02769

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 400 338 A (FLAMMER III GEORGE H) 21 March 1995 (1995-03-21) abstract column 3, line 35 - line 65	15-19, 21, 24-26
A	column 4, line 28 - line 57 column 5, line 38 - line 47 ---	20, 22, 23
A	VALKO A G: "CELLULAR IP: A NEW APPROACH TO INTERNET HOST MOBILITY" COMPUTER COMMUNICATIONS REVIEW, US, ASSOCIATION FOR COMPUTING MACHINERY. NEW YORK, vol. 29, no. 1, page 50-65 XP000823873 ISSN: 0146-4833 page 52, paragraph 3 - paragraph 4 page 55, paragraph 4.1 page 59, paragraph 2 - paragraph 4 page 60, paragraph 5.1 ---	13, 24
A	US 5 533 026 A (WETTERWALD MICHELLE M ET AL) 2 July 1996 (1996-07-02) abstract column 1, line 36 - column 2, line 7 column 2, line 38 - line 63 column 4, line 18 - column 5, line 57 -----	15, 24, 25

# INTERNATIONAL SEARCH REPORT

Information on patent family members


International Application No



PCT/00/02769

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5400338	A	21-03-1995	NONE	
US 5533026	A	02-07-1996	AT 197216 T	15-11-2000
			CA 2170786 A	07-09-1996
			CZ 9702656 A	13-05-1998
			DE 69610761 D	30-11-2000
			WO 9627994 A	12-09-1996
			EP 0813800 A	29-12-1997
			HU 9802235 A	28-01-1999
			JP 8274792 A	18-10-1996
			KR 233347 B	01-12-1999
			PL 321754 A	22-12-1997
			RU 2137307 C	10-09-1999

## INTERNATIONAL PRELIMINARY EXAMINATION REPORT

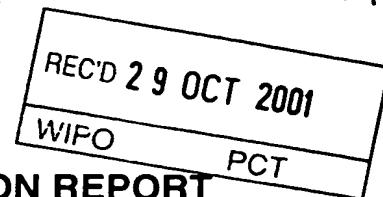(PCT Article 36 and Rule 70)



Applicant's or agent's file reference <b>A25807 WO</b>		<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. <b>PCT/GB00/02769</b>	International filing date (day/month/year) <b>19/07/2000</b>	Priority date (day/month/year) <b>19/07/1999</b>	
International Patent Classification (IPC) or national classification and IPC <b>H04L29/06</b>			
Applicant <b>BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY</b>			
<p>1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.</p> <p>2. This REPORT consists of a total of 6 sheets, including this cover sheet.</p> <p><input type="checkbox"/> This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).</p> <p>These annexes consist of a total of sheets.</p>			
<p>3. This report contains indications relating to the following items:</p> <p>I <input checked="" type="checkbox"/> Basis of the report</p> <p>II <input type="checkbox"/> Priority</p> <p>III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</p> <p>IV <input type="checkbox"/> Lack of unity of invention</p> <p>V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</p> <p>VI <input type="checkbox"/> Certain documents cited</p> <p>VII <input checked="" type="checkbox"/> Certain defects in the international application</p> <p>VIII <input checked="" type="checkbox"/> Certain observations on the international application</p>			
Date of submission of the demand <b>26/01/2001</b>		Date of completion of this report <b>24.10.2001</b>	
Name and mailing address of the international preliminary examining authority:  <b>European Patent Office</b> <b>D-80298 Munich</b> <b>Tel. +49 89 2399 - 0 Tx: 523656 epmu d</b> <b>Fax: +49 89 2399 - 4465</b>		Authorized officer  <b>Pajatakis, E</b>  Telephone No. <b>+49 89 2399 8898</b> 	

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02769

## I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

**Description, pages:**

1-35 as originally filed

**Claims, No.:**

1-26 as originally filed

**Drawings, sheets:**

1/26-26/26 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- ☐ the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
  - ☐ the language of publication of the international application (under Rule 48.3(b)).
  - ☐ the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).
3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:
- ☐ contained in the international application in written form.
  - ☐ filed together with the international application in computer readable form.
  - ☐ furnished subsequently to this Authority in written form.
  - ☐ furnished subsequently to this Authority in computer readable form.
  - ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
  - ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.
4. The amendments have resulted in the cancellation of:
- ☐ the description, pages:
  - ☐ the claims, Nos.:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/GB00/02769

☐ the drawings, sheets:

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

*(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)*

6. Additional observations, if necessary:

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes:	Claims	1-26
	No:	Claims	
Inventive step (IS)	Yes:	Claims	
	No:	Claims	1-26
Industrial applicability (IA)	Yes:	Claims	1-26
	No:	Claims	

2. Citations and explanations  
**see separate sheet**

## VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:  
**see separate sheet**

## VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:  
**see separate sheet**



**Re Item V**

**Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

1. The subject-matter of Claim 15, which has the broadest scope, does not involve an inventive step, Article 33(3).
  - 1.1 **D1 = US-A-5 400 338** discloses a method of controlling routing of packets in a packet switching network including packet switching nodes and access nodes to which a routing path, defined by data held in the packet switching nodes, may be directed for a given address (col. 3, lines 35-47, col. 4, lines 28-41, fig. 1). The method comprises routing packets along a first path for a first address, which path is directed to a first access node serving a mobile node using the first address (col. 3, lines 35-47). The first access node is updated to create a second path for the first address, the second path being directed to a second access node (col. 3, lines 59-65, col. 4, lines 47-57, col. 5, lines 41-47).
  - 1.2 Claim 15 differs from **D1** only in that the first access node is updated by a message from the second access node. This is an obvious choice between functional equivalent alternatives. Since the fact that the mobile node is served by a second access node is known by the mobile node and the second access node, an update message to the first access node must be sent by either the second access node or the mobile node. Sending an update message by the second access node is further supported by the fact that sending updating messages from the mobile node would increase power consumption.
2. According to the Applicant **D1** does not disclose updating of the routing path as the mobile node moves, because in **D1** a packet is addressed to an access node by addressing it to the geographic location of that access node. Also **D1** requires addressing at a different address when the mobile node moves to another access node.

The above opinion of the Applicant does not have any basis in **D1**. According to **D1** (col. 3, lines 59-65, col. 4, lines 47-57, col. 5, lines 41-47) when a mobile node moves out of the range of its original access node, a packet addressed to the

mobile node is forwarded from the original access node to the current access node of the packet. This means that the routing path is updated. Further, **D1** (col. 3, line 65 - col. 4, line 6) clearly mentions that the address of the mobile node does not change when it is served by a new access node.

3. The features of Claim 15 mentioned under point 1.1 are also known from **D2** = *COHEN D ET AL: 'IP ADDRESSING AND ROUTING IN A LOCAL WIRELESS NETWORK' PROCEEDINGS OF THE CONFERENCE ON COMPUTER COMMUNICATIONS (INFOCOM), US, NEW YORK, IEEE, vol. CONF. 11, page 626-632 XP000300088 ISBN: 0-7803-0602-3* (page 627, left col., paragraph 2, page 629, left col., paragraph 2).
4. According to the Applicant **D2** discourages direction of update messages from one access node to another access node, because **D2** discloses updating routing tables by broadcasting messages to the whole network.

It cannot be agreed with this opinion. **D2** (page 629, right col., third paragraph, discloses an embodiment which does not involve routing table updates by broadcasting update messages. Thus, **D2** does not discourage direction of update messages from one access node to another access node.

5. Claim 1 has the features of Claim 15 and additionally mentions that a home address is allocated to a second mobile being served by the first access node. This is a straightforward measure resulting from the fact that when a mobile moves out of the range of an access node an address from the node's address range becomes available.

Thus, the subject-matter of Claim 1 does also not involve an inventive step, Article 33(3).

6. The finding of point 5 also applies to Claim 4, which corresponds to Claim 1.
7. The additional features of the dependent claims do not add anything inventive to the above-mentioned independent claims because these features are either known from the above prior art (limited message propagation, mobility due to

handover, IP protocol) or common measures (hop-by-hop routing).

**Re Item VII**

**Certain defects in the international application**

1. The independent claims are not in the two-part form vis-à-vis **D1**, Rule 6.3(b).
2. The claims do not contain reference signs in parentheses, Rule 6.2(b).
3. **D1** is not mentioned in the description and the description is not adapted to the wording of new independent claims, Rule 5.1(a)(ii)(iii).

**Re Item VIII**

**Certain observations on the international application**

1. The application comprises multiple independent in the same category and does not meet the requirement of conciseness, Article 6.
2. The wording "*said home address*" in Claim 4 (page 37, line 23) is vague because it is left open whether this address is the first home address or not.

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
25 January 2001 (25.01.2001)


PCT

(10) International Publication Number  
**WO 01/06732 A1**

- (51) International Patent Classification<sup>7</sup>: H04L 29/06, 12/56
- (21) International Application Number: PCT/GB00/02769
- (22) International Filing Date: 19 July 2000 (19.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
99305686.0 19 July 1999 (19.07.1999) GB
- (71) Applicant (for all designated States except US): **BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY** [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **O'NEILL, Alan, William** [GB/GB]; 2 Rachael's Court, 36 Cemetery Road, Ipswich, Suffolk IP4 2JA (GB). **CORSON, Mathew, Scott** [US/US]; Ansible Systems, 10122 Ashwood Drive, Kensington, MD 20895 (US).
- (54) Agent: **NASH, Roger, William**; BT Group Legal Services, Intellectual Property Department, Holborn Centre, 8th Floor, 120 Holborn, London EC1N 2TE (GB).
- (81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: ROUTING IN A PACKET SWITCHING NETWORK WITH MOBILE TERMINALS

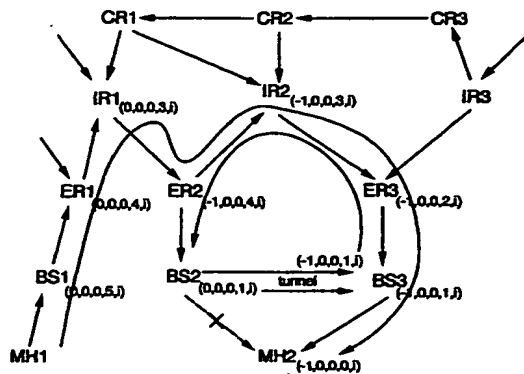

(57) Abstract: A method of controlling routing of packets in a packet switching network including an infrastructure of packet switching nodes interconnected by packet transport links, and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said infrastructure of a given network address, said method comprising: assigning one or more network addresses to a first access node as one or more home addresses of said first access node; dynamically allocating a first said home address to a first mobile node being served via a communications link by said first access node, at least one routing path in said infrastructure being directed to said first access node for said first home address; altering routing in said infrastructure when said first mobile node receives service from a second access node by transmitting routing update messages to a limited subset of said packet switching nodes, said subset being localised in the area of a connecting path between said first and second access nodes, such that at least one routing path in said infrastructure is directed to said second access node for said first home address; and subsequently altering routing in said infrastructure such that at least one routing path in said infrastructure is directed to said first access node for said first home address, and allocating said first home address to a second mobile node being served by said first access node.

WO 01/06732 A1

WO 01/06732 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## ROUTING IN A PACKET SWITCHING NETWORK WITH MOBILE TERMINALS

This invention relates to the routing of telecommunications signals. More particularly it relates to a method of routing such signals to both fixed and mobile telecommunications mediums, such that similar services can be used in the same way by users on either medium, and to allow system operators to reduce costs by greater commonality of switching and other network-based facilities. The present invention is concerned with the routing of packet-based communications such as those used in the "Internet" using the so-called "Internet Protocol" (IP).

10 Present mobile medium systems are arranged such that a mobile user and associated systems collaborate at the interface with the network (typically the radio base station) to enable a mobile node to change from communicating with one base station to communicating with another, and to enable the network to update intelligence points of the new location. In cellular networks, these intelligence points  
15 are the Home and Visitor Location Registers (HLR and VLR), whilst in "Mobile IP" these locations are known as the Home and Foreign Agent. In both cases the "Visitor" Location Register or "Foreign" Agent maintains a record only of those users currently co-operating with base stations under their supervision, whilst their "Home" counterparts maintain a permanent record of their associated users,  
20 including a record of which VLR or Foreign Agent each one is currently working with. The address on an incoming message identifies the relevant HLR/Home Agent, to which reference is made to identify the appropriate VLR/Foreign Agent for more specific routing details. This allows minor changes in location to be effected within the VLR/Foreign Agent, locally to the user's current location without informing the

HLR/Home Agent, which could be some distance away, thereby greatly reducing the signalling overhead.

The additional cost of mobility is the provision of this Home Agent/ Foreign Agent interface, and especially with packet systems, the cost of tunnelling  
5 (forwarding messages from one address to another), address exhaustion (the inability to re-use an address from which forwarding is taking place) and triangular routing.

In a fixed medium system, IP routing is based on the distribution of IP address blocks or prefixes, with an associated metric or route cost, from potential destinations to potential senders so that they and intermediate routers can determine  
10 the best next hop (neighbour router) towards that destination. These routes are pre-computed for all destinations in the network so that senders can immediately send information when generated. Pre-computation of routes, and deployed routing exchange technology, is possible when the sources and destinations have a fixed location, and communication bandwidth is rich enough for exhaustive exchange of  
15 routes. As the proportion of roaming increases however, such models break down and a more dynamic routing approach is required.

A proposal referred to as "HAWAII" was published 19 February, 1999 as an Internet-draft entitled "IP Micro-Mobility Support Using HAWAII", R. Ramjee, T. La Por, S. Thuel, K. Varadh, posted on the Internet Engineering Taskforce Internet site  
20 at [HTTP://www.ietf.org/internet-drafts/draft-ramjee-micro-mobility-hawaii-00.txt](http://www.ietf.org/internet-drafts/draft-ramjee-micro-mobility-hawaii-00.txt). HAWAII uses specialised path set up schemes which install host-based forwarding entries in specific routers when in a routing domain to support intra-domain micro-mobility, and defaults to using "Mobile-IP" for inter-domain micro-mobility. In HAWAII, mobile hosts retain their network address while moving within the domain.  
25 The HAWAII architecture relies on a gateway router into a domain, referred to as the

domain root router, to which default routes within the domain are directed. Each mobile host is assigned a home domain based on its permanent IP address. The path set up scheme updates a single routing path in a domain so that connectivity to the mobile host is possible both before and after handoff at the wireless link layer. Only  
5 routers located along a single routing path between the domain root router and the base station currently serving the mobile host have routing table entries for the mobile host's IP address. The remainder of the routers in the domain route any packets addressed to the mobile host upwards along default routes which rely on the tree-like nature of the routing domain, rooted at the domain root router, to provide  
10 an intersection with the downrouting towards the mobile host along the single routing path for which the routers have individual host entries for the mobile host's IP address.

In HAWAII, mobility between domains is supported by "Mobile IP" mechanisms. The home domain root router is designated as the Home Agent, and  
15 encapsulated IP packets are forwarded via the Foreign domain root router.

Drawbacks with the HAWAII proposals include the concentration of Mobile IP tunnels in few nodes in the core of the network, the domain root routers, such that failure of any of these nodes may result in large-scale failure of all Mobile IP state and associated sessions handled by the failing node. Furthermore, since all  
20 routing from outside the home domain into the home domain, and in the reverse direction, must occur via the home domain root router, failure of the home domain root router may also result in large-scale failure.

A paper entitled "IP Addressing and Routing in a Local Wireless Network", Cohen et al., Infocom '92, IEEE describes a temporary addressing scheme whereby a  
25 temporary IP address is assigned dynamically when a mobile unit powers up by a



base station from which it receives service. Every base station has a "bank" of IP addresses permanently associated with it. This has the advantage that when the mobile unit powers up, no routing table updates are triggered. However, when the mobile unit moves to a different base station, the routing tables in the network are  
5 updated using conventional IP routing update messages broadcast throughout the network, or possibly subnetwork. A disadvantage is that the routing signalling load is high, particularly when large numbers of mobile units are active in the network. Furthermore, an address consultant entity is provided to determine whether an IP address may be re-used. This address consultant houses the bank of IP addresses  
10 and is also informed whenever a mobile unit moves between base stations. This again increases routing signalling load in the network.

In accordance with one aspect of the invention, there is provided a method of controlling routing of packets in a packet switching network including an infrastructure of packet switching nodes interconnected by packet transport links,  
15 and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said infrastructure for a given network address, said method comprising:

assigning one or more network addresses to a first access node as one or more home addresses of said first access node;

20 dynamically allocating a first said home address to a first mobile node being served via a communications link by said first access node, at least one routing path in said infrastructure being directed to said first access node for said first home address;

altering routing in said infrastructure when said first mobile node receives  
25 service from a second access node by transmitting routing update messages to a

limited subset of said packet switching nodes, said subset being localised in the area of a connecting path between said first and second access nodes, such that at least one routing path in said infrastructure is directed to said second access node for said first home address; and

- 5 subsequently altering routing in said infrastructure such that at least one routing path in said infrastructure is directed to said first access node for said first home address, and allocating said first home address to a second mobile node being served by said first access node.

A network address may hence be associated over the longer term with a  
10 given access node, and allocated to a mobile node when receiving service in that access node, whilst shorter term mobility of the mobile node between access nodes is also possible. By sending routing update messages to only a limited subset of said packet switching nodes, localised in the area of a connecting path between access nodes, the routing signalling load in the network due to mobility may be reduced.

- 15 In accordance with another aspect of the present invention there is provided a method of controlling routing of packets in a packet switching network including an infrastructure of packet switching nodes interconnected by packet transport links, and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said  
20 infrastructure for a given network address, said method comprising:

assigning one or more network addresses to a first access node as one or more home addresses of said first access node;

dynamically allocating a first said home address to a first mobile node being served via a communications link by said first access node, at least one routing path

in said infrastructure being directed to said first access node for said first home address;

altering routing in said infrastructure when said first mobile node receives service from a second access node such that at least one routing path in said  
5 infrastructure is directed to said second access node for said first home address; and

when said home address becomes available for re-allocation, altering routing in said infrastructure such that at least one routing path in said infrastructure is directed to said first access node for said first home address, and transmitting a routing message to said first access node indicating that said first home address may  
10 be allocated to a second mobile node being served by said first access node.

By returning the routing to the first access node and transmitting a routing message to the first access node indicating that it may re-allocate the home address when it becomes free, the need for a separate address attendant, which requires frequent updating due to changes in routing, may be avoided.

15 In accordance with a further aspect of the invention, there is provided a method of controlling routing of packets in a packet switching network including an infrastructure of packet switching nodes interconnected by packet transport links, and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said  
20 infrastructure for a given network address, said method comprising:

routing packets along a first routing path for a first network address, which routing path is one of a first plurality of routing paths directed to a first access node in said infrastructure for said first network address, said first access node serving a mobile node using said first network address via a communications link;

transmitting a directed routing update message to said first access node from a second access node, to create a second routing path for said first network address, said second routing path being directed to said second access node.

This aspect provides a convenient and yet reliable way of altering routing in the infrastructure for the first network address, when a plurality of routing paths in the infrastructure are directed to a single access node for the first network address.

Further aspects and advantages of the invention will become apparent from embodiments which will now be described, by way of example only, with reference to the accompanying drawings, in which:

10        Figure 1 schematically illustrates an example of a fixed/mobile topology in accordance with an embodiment of the present invention;

Figures 2 to 11 schematically illustrate inter-base station handover and the accompanying routing updates in accordance with an embodiment of the present invention;

15        Figures 12 to 16 illustrate inter-base station handover and the accompanying routing updates in accordance with a further embodiment of the invention;

Figures 17 to 25 illustrate the restoration of routing to a home base station in accordance with an embodiment of the invention;

20        Figure 26 schematically illustrates a routing protocol data table held in a routing node in accordance with an embodiment of the invention; and

Figure 27 illustrates a next-hop forwarding table held in the routing node in accordance with an embodiment of the invention.

Referring now to Figure 1, an example of a fixed/mobile topology in accordance with an embodiment of the present invention is shown. The topology includes, by way of example, three packet switching networks 2, 4, 6 forming an

25

Autonomous System (AS), the extent of which is schematically indicated by dark shading in Figure 1. One definition given for the term Autonomous System, is "a set of routers and networks under the same administration" ("Routing in the Internet", Christian Huitema, Prentice-Hall, 1995, page 158). Herein, the term Autonomous System, also referred to as a routing domain in the art, is also intended to mean a network, or a set of networks, having routers running the same routing protocol. An Autonomous System may be connected to other Autonomous Systems forming a global internetwork such as the Internet (used by way of example hereinafter). The routing protocol is an interior gateway protocol, and communications with other Autonomous Systems are achieved via exterior gateway protocols such as the Border Gateway Protocol (BGP). Examples of known interior gateway protocols are the Routing Information Protocol (RIP) and Open Shortest Path First (OSPF).

The networks 2, 4, 6 forming a fixed infrastructure of the Autonomous System include a plurality of Internet Protocol (IP) packet switching nodes in the form of a plurality of Core Routers (CR), a plurality of Edge Routers (ER) and Bridge Routers (BR) interconnecting the different networks 2, 4, 6 in the AS. All of these packet switching nodes run a single IP routing protocol, one embodiment of which is to be described in further detail below.

One or more Exterior Gateway Routers (EGRs) connect the Autonomous System to further Autonomous Systems of the global Internet.

The Autonomous System illustrated in Figure 1 performs routing for both mobile hosts, for which routing within the AS is altered as a result of mobility of the mobile, and fixed, hosts, that is to say stationary, hosts, for which no such routing alterations occur.

Mobile nodes may be connected to an Edge Router via a wireless link, in the example shown, a cellular radio link (a further possible type of wireless link is an infra-red link) using a Base Station (BS) Router provided by a mobile network operator. The cellular radio link may be a Time Division Multiplier Access (TDMA) system link, such as "GSM", or a Code Division Multiple Access (CDMA) system link, such as "CDMA 2000". Mobile nodes take the form of individual mobile hosts 14, and/or mobile routers 16 having a plurality of hosts attached thereto, which respectively conduct radio communication with one or more (e.g. in the case of a CDMA "soft handover") of the BS Routers at any given time. A BS Router may control a number of Base Transceiver Stations (BTSs) which are co-located with radio antennae around which individual "cells" of the cellular system are formed

The mobile nodes 14, 16 move between cells of the cellular radio communications network. If a BS Router serves a number of cells, a mobile node handed over between cells may continue to receive packet data via the same BS Router. However, once a mobile node moves outside the range of a BS Router via which it is receiving service, handing over to a new cell may necessitate a change of routing within the AS. Data packets originating from and destined to the mobile node in question, which are routed, using the identifier of the, or an, IP address of the node, via a given BS Router prior to handover, may require routing, for the same IP address, via a different BS Router following handover. A mobile node may be participating in a communications session with a different host via the AS during handover from one BS Router to another. Because connections at the transport layer (in, for example, a TCP/IP connection) are defined in part by the IP address of the mobile node, such a change in routing is desired to allow such connections to

continue using the same IP address when a mobile node receives service from a different BS Router.

Fixed hosts may be connected to an Edge Router via a Local Area Network (LAN) 10, running a local area network protocol such as an Ethernet protocol. Fixed  
5 hosts may also be connected to an Edge Router via a Public Services Telephone Network (PSTN) 12 using a Network Access Server (NAS) 20 provided by an Internet access provider. The NAS 20 dynamically allocates fixed IP addresses on a dial-up basis to fixed hosts connecting to the NAS 20 using a protocol such as PPP or SLIP, and routes IP packets originating from, or destined to, each fixed host via an  
10 associated Edge Router. Whilst the NAS 20 allocates IP addresses on a dynamic basis, the Edge Router via which packets are routed for the IP address allocated does not change, either during an access session or over a longer-term period. Thus, routing within the Autonomous System does not need to change for each of the fixed hosts other than due to factors internal to the AS such as link failure or traffic  
15 management.

The interior gateway protocol, the single IP routing protocol used in the AS in this embodiment of the present invention is a modified version of the Temporally-Ordered Routing Algorithm (TORA) routing protocol, which is described in, inter alia, "A Highly Adaptive Distributed Routing Algorithm for Mobile Wireless Networks"  
20 Vincent D Park and M Scott Corson, Proceedings of INFOCOM '97, April 7-11, Kobe, Japan; and "A Performance Comparison of the Temporally-Ordered Routing Algorithm and Ideal Link-State Routing" Vincent D Park and M Scott Corson, Proceedings of ISCC '98, 30 June - 2 July, 1999, Athens, Greece.

The TORA routing protocol algorithm executes distributedly, provides loop-  
25 free routes, provides multiple routing (to alleviate congestion), establishes routes

quickly (so they may be used before the topology changes), and minimises communication overhead by localising algorithmic reaction to topological changes when possible (to conserve available bandwidth and increase scalability).

The algorithm is distributed in that nodes need only maintain information  
5 about adjacent nodes (i.e. one hop knowledge). It ensures all routes are loop-free, and typically provides multipath routing for any source/ destination pair which requires a route. Since multiple routes are typically established, many topological changes do not require routing updates within the AS as having a single route is sufficient. Following topological changes which do require reaction, the protocol re-  
10 establishes valid routes.

The TORA protocol models a network as a graph  $G = (N, L)$ , where  $N$  is a finite set of nodes and  $L$  is a set of initially undirected links. Each node  $i \in N$  has a unique node identifier (ID), and each link  $(i, j) \in L$  allows two-way communication (i.e. nodes connected by a link can communicate with each other in either direction).  
15 Each initially undirected link  $(i, j) \in L$  may subsequently be assigned one of three states; (1) undirected, (2) directed from node  $i$  to node  $j$ , or (3) directed from node  $j$  to node  $i$ . If a link  $(i, j) \in L$  is directed from node  $i$  to node  $j$ , node  $i$  is said to be "upstream" from node  $j$  while node  $j$  is said to be "downstream" from node  $i$ . For each node  $i$ , the "neighbours" of  $i$ ,  $N_i \in N$ , are defined to be the set of nodes  $j$  such  
20 that  $(i, j) \in L$ . Each node  $i$  is always aware of its neighbours in the set  $N_i$ .

A logically separate version of the protocol is run for each destination (identified by e.g. a host IP address) to which routing is required.

The TORA protocol can be separated into three basic functions: creating routes, maintaining routes, and erasing routes. Creating a route from a given node  
25 to the destination requires establishment of a sequence of directed links leading from



the node to the destination. Creating routes essentially corresponds to assigning directions to links in an undirected network or portion of the network. The method used to accomplish this is a query/reply process which builds a directed acyclic graph (DAG) rooted at the destination (i.e. the destination is the only node with no downstream links). Such a DAG may be referred to as a "destination-oriented" DAG. Maintaining routes involves reacting to topological changes in the network in a manner such that routes to the destination are re-established within a finite time. Upon detection of a network partition, all links (in the portion of the network which has become partitioned from the destination) are marked undirected to erase invalid routes.

The protocol accomplishes these three functions through the use of three distinct control packets: query (QRY), update (UPD), and clear (CLR). QRY packets are used for creating routes, UPD packets are used for both creating and maintaining routes, and CLR packets are used for erasing routes.

At any given time, an ordered quintuple, referred to as a "height",  $H_i = (\tau_i, \text{oid}_i, r_i, \delta_i, i)$  is associated with each node  $i \in N$ . Conceptually, the quintuple associated with each node represents the height of the node as defined by two parameters: a reference level and a delta with respect to the reference level. The reference level is represented by the first three values in the quintuple while the delta is represented by the last two values. A new reference level is defined each time a node loses its last downstream link due to a link failure. The first value representing the reference level,  $\tau_i$ , is a time tag set to the "time" of the link failure. The second value,  $\text{oid}_i$ , is the originator-ID (i.e. the unique ID of the node which defined the new reference level). This ensures that the reference levels can be totally ordered lexicographically. The third value,  $r_i$ , is a single bit used to divide each of the unique

reference levels into two unique sub-levels. This bit is used to distinguish between the original reference level and its corresponding, higher reflected reference level. The first value representing the delta,  $\delta_i$ , is an integer used to order nodes with respect to a common reference level. This value is instrumental in the propagation of a reference level. Finally, the second value representing the delta  $i$ , is the unique ID of the node itself. This ensures that nodes with a common reference level and equal values of  $\delta_i$  (and in fact all nodes) can be totally ordered lexicographically at all times.

Each node  $i$  (other than the destination) maintains its height,  $H_i$ . Initially the height of each node in the network (other than the destination) is set to NULL,  $H_i = (-, -, -, -, i)$ . Subsequently, the height of each node  $i$  can be modified in accordance with the rules of the protocol. In addition to its own height, each node  $i$  maintains, in a routing protocol data table, entries against host IP addresses having an existing DAG in the network, the entries including a height array with an entry  $HN_{ij}$ , for each neighbour  $j \in N_i$ .

Each node  $i$  (other than the destination) also maintains, in the routing protocol data table, a link-state array with an entry  $LS_{ij}$  for each link  $(i, j) \in L$ . The state of the links is determined by the heights  $H_i$  and  $HN_{ij}$  and is directed from the higher node to the lower node. If a neighbour  $j$  is higher than node  $i$ , the link is marked upstream. If a neighbour  $j$  is lower than node  $i$ , the link is marked downstream.

The TORA protocol was originally designed for use in a Mobile Ad-Hoc Network (MANET) in which the routers are mobile and are interlinked via wireless links. However, in this embodiment of the invention a modified TORA protocol is used in an Autonomous System including a fixed infrastructure of fixed routers

interconnected by fixed links, such as that illustrated in Figure 1, to provide for routing alterations in the fixed infrastructure when a mobile host alters its point of attachment to the infrastructure.

Figure 26 illustrates schematically an example of a routing protocol data  
5 table which may be held in a router in accordance with this embodiment.

Against each host IP address (or address prefix in the case of an aggregated DAG, to be described in further detail below) IP1, IP2, etc having a DAG in the network is stored the height of the storing node  $H_i(IP1)$ ,  $H_i(IP2)$ , etc. Also, the identity of each adjacent neighbour for example w, x, y, z and that neighbour's  
10 height  $HN_{iw}(IP1, IP2, \text{etc})$ ,  $HN_{ix}(IP1, IP2, \text{etc})$ ,  $HN_{iy}(IP1, IP2, \text{etc})$  and  $HN_{iz}(IP1, IP2, \text{etc})$ . Finally, the link-state array for each IP address (or prefix) may be stored in the form of markings signifying an upstream link (U), a downstream link (D), or an undirected link (-) against each link identity (L1, L2, L3, L4) corresponding to each neighbour.

15 The link-state array held in the routing protocol data table allows a next-hop forwarding decision to be made locally in the router holding the data. For a sufficiently interconnected network, each router should have at least one downstream link. If only one downstream link exists, that link is selected as the next-hop forwarding link. If more than one downstream link exists, an optimum  
20 downstream link may be selected, for example on the basis of current traffic loading on the two links. In any case, the selected link is entered into a next-hop forwarding data table against the IP address. A next-hop forwarding table, such as that illustrated in Fig. 27, is held in cache memory for fast access as IP packets requiring routing arrive at the router. The table stores the next-hop forwarding link (L2, L1,  
25 etc) selected, against each IP address (or prefix) IP1, IP2, etc.

The use of a fixed infrastructure of routers, and other aspects of the invention to be described below, allow for routing aggregation within the AS, in particular for the IP addresses of mobile hosts. What follows is a brief description of IP addressing, in particular how variable length prefixes are used to provide routing aggregation in an IP routing network.

IP addresses currently consist of a predetermined number (32) of bits. IP addresses were in the past allocated on an unstructured basis (referred to as a "flat" addressing plan). Classful addressing introduced the concept of a two level routing hierarchy by splitting addresses into network prefix and host fields. Users were allocated IP addresses as either a class A, class B or class C to simplify routing and administration.

In class A, bit 0 identifies class A, bits 1-7 identify network (126 networks) and bits 8-31 identify host (16 million hosts).

In class B, bits 0-1 identify class B, bits 2-15 identify network (16,382 networks) and bits 16-31 identify host (64,000 hosts).

In class C bits 0-2 identify class C, bits 3-23 identify network (2,097,152 networks) and bits 24-31 identify host (256 hosts).

A two-level hierarchy still left a flat routing hierarchy between hosts within a network. For example, a class A address block could have 16 million hosts which would result in all routers within the network containing 16 million routing table entries. Subnetting was developed to allow a host address block to be split into a variable length subnet field and host field. This allows routers within an AS to keep routing table entries for subnets only (providing the aggregation of routing for all the hosts on each subnet). A subnet mask is used to enable routers to identify the subnet part of the address.

In accordance with this embodiment of the invention, routing aggregation is provided by assigning a host IP address block (i.e. a contiguous sequence of IP addresses sharing one or more prefixes) to an access node such as a BS Router, and dynamically allocating IP addresses from within the block to mobile hosts for the duration of their access sessions. When a mobile host registers with the cellular network on power up, the serving BS Router allocates an IP address and caches a binding between the mobile host's wireless link identifier and the allocated IP address. An aggregated routing plan, in this embodiment an aggregated DAG is pre-computed within the AS before the mobile host is allocated the IP address it is to use throughout its access session. Following power down of the mobile host, the IP address is returned to the owning BS Router, which may then allocate the IP address to another mobile host. Mobile host IP addresses allocated by a BS Router will have an aggregated DAG, until at least one of the mobile hosts moves away, in which case the aggregated DAG will remain in place, but a host-specific exception will be created on the routers affected by a mobility-specific routing updating procedure (the update only changes routing for the single mobile which has moved away).

Pre-computation of routes in an AS for address prefixes owned by a BS Router is achieved by the owning BS Router injecting an update message, referred to herein as an "optimization" (OPT) packet, for each prefix which floods out across the AS and effectively acts as a prefix announcement as well as building the aggregated DAG. The OPT packet is transmitted by the BS Router owning the IP address prefix, or prefixes, and controlling the aggregated DAG. The OPT packet propagates to all other nodes in the network (regardless of their current heights (if set)), and (re)sets these heights to the "all-zero" reference level, that is to say the first three values ( $T_i$ ,  $\delta_i$ ,  $n$ ) of the TORA heights are all set to zero. The fourth height value,  $\delta_i$ , is set to

the number of hops taken by the OPT packet since transmission from the BS Router (this is similar to UPD packet propagation in known TORA source-initiated DAG creation mechanisms). An increment of 1 may be added to represent the hop from the BS Router to the mobile node. The fifth height value,  $i$ , is set to the node ID.

5        Once an aggregated DAG exists in the AS, each packet switching node in the AS has a next-hop forwarding table entry for the IP address prefix in question. When a packet arrives at a node which requires routing, the node searches its next-hop forwarding table for the longest matching address entry on which to base the next routing decision, which, providing the mobile node using the IP address has not  
10 moved away from the owning BS Router, will be the IP address prefix. By providing for aggregated DAGs within the AS, routing table size and routing processing may be minimised at each packet switching node.

However, when a mobile node is handed over at the wireless link layer away from the BS Router at which it first received service in the network, an individual  
15 host address entry is created in both the routing protocol data table and the next-hop forwarding table in (a limited number of) packet switching nodes affected by routing updates caused by the mobility of the mobile node. These nodes continue to store the corresponding aggregated address entries, but use the host address entry for routing packets to the IP address of the mobile node by virtue of a longest match  
20 search.

The TORA height maintenance algorithm falls into the same general class of algorithms originally defined in "Distributed Algorithms for Generating Loop-Free Routes in Networks with Frequently Changing Topology", E Gafni and D Bertsekas, IEEE Trans. Commun., January 1991. Within this class, a node may only "increase"  
25 its height; it may never decrease its height. However, in this embodiment of the

invention, an algorithmic modification is provided to ensure that, after an inter-BS Router handover, a node's forwarding behaviour is such that, when a plurality of routing interfaces to neighbouring nodes exist, it forwards packets over a routing interface to a neighbouring node from which a mobility-related routing update was most recently received. The  $\tau$  time value in the height quintuple ( $\tau_i$ ,  $oid_i$ ,  $r_i$ ,  $\delta_i$ ,  $i$ ) stored in the router's routing protocol data table as an entry against the mobile node's IP address and the neighbour in question is permitted to become "negative", i.e. less than zero, to indicate a mobility-related update having occurred, and the magnitude of the negative  $\tau$  time value increases for each occurrence of a mobility-related routing update for a given IP address. Thus, the most recent mobility-related update is indicated by the greater negative  $\tau$  time value. It is to be noted, that whilst mobility-related routing updates are distinguished by a negative  $\tau$  time value, other indicators may also be used, such as a one-bit flag, to replace the negative flag.

When a mobile node changes BS Router affiliation, it decreases its height value by decreasing the  $\tau$  time value, for example by an integer, and the new value is propagated to a limited number of nodes in the AS as part of a mobile-initiated update of the DAG associated with the mobile node's IP address, to be described in further detail below. A node having multiple downstream neighbours routes onto the most recently-activated downstream link. The heights are still totally-ordered (hence routing loop freedom is preserved).

A further aspect of this embodiment of the invention is that, during a handover of a mobile node at the wireless link layer, a temporary, short term, tunnelling mechanism is provided whereby data packets arriving at the BS Router from which the mobile node is being handed over may be forwarded to the BS

Router to which the mobile node is being handed over. Tunnelling in an IP packet switching network may be achieved by encapsulation of the data packet with a new IP header (addressed to the IP address of the new BS Router), referred to as "IP-in-IP tunnelling". At the new BS Router, the packet is decapsulated and forwarded to the

5 mobile node via the wireless link. Tunnel setup, signalling and authentication mechanisms may be those used in "Mobile IP", as described in, inter alia, "IP Mobility Support", C Perkins, ed., 1ETF RFC 2002, October 1996. With all BS Routers enabled with "Mobile IP", "Mobile IP" may also be used to allow packet forwarding to mobile nodes moving to a different AS. Other possible tunnelling

10 protocols include UDP tunnelling (in which a UDP header is added to incoming packets), GRE tunnelling (a CISCO (TM) protocol), the Layer 2 Tunnelling Protocol (L2TP), and negotiated or configured IPSEC tunnel modes.

When a mobile node is to be handed over from a BS Router, that BS Router interacts with the new BS Router, to which the mobile node is being handed over to,

15 to undertake the following steps:

(a) to prepare a unidirectional tunnel to the new BS Router, so that packets may be forwarded to the mobile node after the wireless link between the old BS Router and the mobile node is lost. The tunnel may be prepared by a mapping to a pre-existing inter-BS Router tunnel, or a host-specific tunnel, dynamically

20 negotiated via Mobile IP mechanisms.

(b) to handover the mobile node at the wireless link layer.

(c) to inject a routing update for the mobile node's IP address (or addresses, in the case of a mobile router) from the new BS Router.

(d) to forward data packets destined to the mobile node's IP address and

25 arriving at the old BS Router though a tunnel link to the new BS Router.



(e) to update the invalid routing to the old BS Router.

(f) to tear down the tunnel, if host specific, or to remove the host-specific state in a pre-existing tunnel, following the convergence of routing.

Prior to handover, all packets are routed directly to the mobile node via a  
5 route, or routes, in the infrastructure passing through the old BS Router. Following the convergence of routing, all packets are routed directly to the mobile node via a route, or routes, in the infrastructure passing through the new BS Router.

When handover is signalled to the new BS Router (either from the old BS Router as part of tunnel establishment, or from the mobile node via a mobile-assisted  
10 handover), the new BS Router generates a directed routing update message which is unicast to the old BS Router using the existing DAG for the mobile node's IP address (which remains directed to the old BS Router). This update selectively modifies the mobile's DAG along the reverse lowest-neighbour path (an approximate shortest path) to the old BS Router. At the end of this update, the old BS Router will have a  
15 new downstream link in the DAG for the mobile node's IP address after the mobile node is handed over at the radio link layer. A crossover router will, during the update process, receive the unicast-directed update at which point an existing data flow is redirected to the mobile node's new BS Router.

This update procedure is not topologically dependent, and is employed  
20 regardless of the topological distance between the new and old BS Routers (which can vary substantially depending on the BS Routers' relative positions).

The short term tunnel avoids packet loss in the case routing to the new BS Router is not established by the time the wireless link to the old BS Router is lost, and if no significant amount of caching is performed at the old BS Router.

The use of a short-term tunnel may nevertheless not always be necessary, depending on the relative ordering of the two events:

(i) loss of the BS Router-to-mobile node wireless link at the old BS Router and

5 (ii) arrival of the directed routing update at the old BS Router.

If the routing update arrives before the old wireless link is lost, there is no need for the tunnel as no further data packets will arrive at the old BS Router due to the rerouting (providing control and data packets have equal queuing priority and treatment; if not, then data packets already queued may still arrive after the routing  
10 update) and all past data packets will have been forwarded to the mobile over the old wireless link. If no tunnel is required, the premature triggering of a TORA update at the old BS Router, due to a loss of all downstream links when the old wireless link is lost, may be prevented by marking a virtual downstream link at the old BS Router until routing converges. Thus, routing hold-down at the old BS Router may be  
15 achieved purely by signalling.

Routing hold-down purely by signalling may also be used where the old BS Router functions as a cache, for example a transparent cache, allowing the old BS Router to store relatively large volumes of data until routing converges, and retransmitting the data once routing converges.

20 As mentioned above, when a mobile node ends its access session, the routing for the mobile node's IP address may be returned to the BS Router from which it originated, i.e. the IP address's home BS Router. A mechanism is provided to efficiently restore the destination of the DAG to the home BS Router, which requires the participation of only a limited number of nodes in the AS.

When a mobile node ends its access session, the current BS Router contacts the IP address's home BS Router and initiates the transfer of the destination of the DAG to the home BS Router. Again, a tunnel link can be used as a hold-down mechanism to suppress the initiation of a routing update at the current BS Router or, more simply, a virtual link (a non-functioning downstream link marking at the current BS Router) may be used if no data is to be forwarded. The current BS Router establishes a tunnel link or a virtual downstream link directed to the home BS Router. In response, the home BS Router generates a directed "restore" update which is sent towards the current BS Router using the existing DAG for the mobile node's IP address (which remains directed to the current BS Router). This update deletes all the host-specific routing protocol data table entries and next-hop forwarding table entries created by the previous mobility of the mobile node, to restore the pre-computed aggregated DAG as the active routing plan for the mobile node's IP address. The update travels over the path previously created by routing updates caused by the mobile node's past mobility. Thus, the set of negative height values that the mobility-specific updates generated are erased, and the aggregated DAG with its "all-zero" reference level (assuming there have been no failures in the network causing new height generations and reversals) is reactivated. The tunnel link or the virtual link can be maintained until reception of the restore update at the current BS Router, at which time either the tunnel is torn down or the virtual link is removed.

Periodically, or on detection of a triggering event, the mobile node, or a BS Router acting on behalf of the mobile node, may re-initialise the DAG for an IP Address, using a TORA update mechanism, with "all-zero" reference levels thereby removing any mobility-related routing table entries for the DAG. "All-zero" reference

levels propagated in this manner take precedence over all other height values (both positive and negative) and may propagate throughout the AS (an AS-wide DAG re-optimisation). This provides a mechanism for soft-state route maintenance, which overrides the mobility-related updating mechanism.

5           A detailed example of inter-BS handover at the wireless link layer and routing updates within the fixed infrastructure of an AS will now be described with reference to Figures 2 to 11. A further example is described with reference to Figures 12 to 16. Finally, a detailed example of the restoration of routing to a home BS after the end of a mobile host access session is described in relation to Figures  
10 17 to 25. In each of the TORA height quintuples illustrated in Figures 2 to 25, the node ID is depicted using the reference *i*, for simplicity. However, it will be appreciated that this value will be different for each node, so as to uniquely identify the node within the AS. It will also be noted that only a part of the AS is illustrated, for the sake of simplicity.

15           In all of the following examples, the AS includes a plurality of fixed core routers (CR1, CR2 ...), a plurality of fixed intermediate routers (IR1, IR2...) and a plurality of fixed edge routers (ER1, ER2...), classified in accordance with their relative proximity to the topological "edge" of the fixed infrastructure. The core routers may be adapted to handle higher quantities of traffic than the intermediate  
20 routers, and the intermediate routers, in turn, may be adapted to handle higher quantities of traffic than the edge routers. For example, the core routers may handle national traffic, the intermediate routers regional traffic, and the edge routers sub-regional traffic.

          Packet switching routers are co-located and functionally combined with  
25 wireless base stations and the combined entity will be referred to herein as an

access node (BS1, BS2 ...), although it should be appreciated that the term "access node" is not intended to be restricted to a routing node including wireless BS functionality. For example, an "access node" may be provided at a node which is topologically distant from a BS.

5           In the case of all of the examples described below, the hop-by-hop routing directionality at the interfaces is indicated by arrows marked along links between nodes of the network, and between access nodes and mobile nodes (which links include a wireless link). The distributed routing plan is in the form of a TORA DAG directed at a single receiving mobile host, MH2. Before the mobile host MH2 begins  
10 an access session, and is dynamically allocated an IP address, a pre-computed and aggregated DAG exists for the IP address within the AS, having been injected as an AS-wide update from the access node allocating the IP address, node BS2. In Figures 2 to 25, nodes involved in routing updates or packet forwarding are marked with their TORA height quintuple ( $\tau_i$ ,  $oid_i$ ,  $r_i$ ,  $\delta_i$ ,  $i$ ). As previously described, this  
15 TORA height is also stored within the routing protocol data table of each neighbouring node, having been advertised from the node to which the height applies.

When the mobile node MH2 registers with the home access node BS2, the home access node caches the identity of the mobile host at the wireless link layer  
20 against the IP address which is allocated, thus forming a mobile-specific entry in a routing table held in node BS2.

Figure 2 illustrates an exemplary communications session (for example, a TCP/IP connection) occurring between the mobile node MH2 and a further host, in this case a mobile host, MH1. In the following examples, mobility of the  
25 correspondent mobile host MH1 does not occur, although such mobility is possible

using the same functionality which is to be described in relation to the mobility of the node MH2. A similar communications session may also be conducted with a correspondent fixed host. Notably, a separate DAG exists within the AS directed towards the node MH1, whereby data packets originated from the node MH2 are  
5 routed to the node MH1. As this DAG directed to the node MH1 does not alter, and routing exists towards the node MH1 from each access node which the node MH2 affiliates with, no further description of routing towards the node MH1 will be provided.

Data packets originated from the node MH1 and destined to the node MH2  
10 are initially routed to the home access node BS2 via its aggregated DAG, for example via fixed nodes BS1, ER1, IR1, and ER2, as shown in Figure 2.

Referring now to Figure 3, a wireless link layer inter-BS handover decision may be made either by the node MH2 itself, or by the node BS2. In the case of a mobile node-initiated handover, the decision may be made based on a comparison of  
15 wireless link quality between signals received from the nodes BS2 and BS3. As the mobile node MH2 moves, the signal received from access node BS3 may improve, whilst the signal received from access node BS2 worsens, and at a threshold decision event, the mobile host responds by initiating a handover between nodes BS2 and BS3. In the case of a handover decision made at node BS2, the decision  
20 may be made based on other considerations, such as traffic load. In such a case, the access node BS2 transmits a handover instruction to node MH2.

Whether the inter-BS handover is initiated by the mobile node MH2 or the home access node BS2, the mobile node MH2 selects a new access node BS3 and transmits a tunnel initiation (TIN) packet to the home access node BS2. The TIN  
25 packet includes the IP address of the new access node BS3, which the mobile node

reads from a beacon channel broadcast by access node BS3. Mobile node MH2 also computes a new height, by decreasing the  $\tau$  time value of its height to a negative value, -1 (indicating a first mobility-related routing update away from the home access node BS2), and includes this in the TIN packet.

5 Referring now to Figure 4, when the home access node BS2 receives the TIN packet from mobile node MH2, the home access node BS2 establishes a short term IP-in-IP tunnel link towards the new access node BS3. The home access node BS2 enters the tunnel interface to BS3 in its routing table, the TORA height of the new access node BS3 being set equal to (-1, 0, 0, 1, i) to ensure the tunnel  
10 interface being marked as a downstream link for data packet forwarding during the remainder of the handover procedure.

When the short-term tunnel link has been established from home access node BS2 to new access node BS3, the home access node BS2 forwards the TIN packet received from mobile node MH2 to the new access node BS3 via the tunnel  
15 interface.

In the present example, the nature of the wireless link system used is such that the mobile node MH2 is (as in a CDMA cellular radio system allowing soft handover) able to communicate via two wireless links to each access node BS2 and BS3 during a handover. Thus, next, the mobile node MH2 establishes a second  
20 wireless link with the new access node BS3, and a routing table entry is made in node BS3 indicating a downstream link towards mobile node MH2.

The new access node BS3 generates a unicast-directed update (UUPD) packet and transmits the packet to its neighbouring node in the fixed infrastructure, node ER3. The UUPD packet is to travel along a unicast path between the new  
25 access node BS3 and the home access node BS2, updating entries in the routing

protocol data tables, and consequently also in at least some of the next-hop forwarding tables, of all nodes along the update path, and all nodes immediately adjacent to the nodes along that path (the nodes along the path transmit an advertisement of their new heights to each immediately neighbouring node, the  
5 propagation of the advertisements being limited to one hop).

Referring now to Figure 6, after the mobile host MH2 establishes a new wireless link with the new access node BS3, the old wireless link to the home access node BS2 is pulled down. Data packets directed to the mobile node MH2 arriving at the home access node BS2 are forwarded to the new access node BS3  
10 via the short-term tunnel, and onward to the mobile node MH2 via the new wireless link.

Although the old wireless link is now lost, no routing update is yet triggered at the home access node BS2 (as would otherwise occur according to the TORA protocol), since a remaining downstream link exists along the tunnel which has been  
15 established between the home access node BS2 and the new access node BS3. Thus, routing towards the home access node BS2 remains in place until the routing update initiated from the new access node BS3 arrives at the home access node BS2. As shown in Figure 6, the UUPD packet is forwarded from the first node ER3 receiving the UUPD packet, which also updates its height with the negative  $\tau$  time  
20 value associated with the mobility update (-1), to node IR2. Node IR2, in turn, updates its height with the negative  $\tau$  time value associated with the mobility-related update.

Each node along the routing update unicast route also increments its  $\delta$  value in the TORA height quintuple by one for each hop of the routing update UUPD  
25 packet, so that the  $\delta$  value represents the number of hops to the mobile node via the



new access node BS3, in place of the  $\delta$  values of the previous routing table entry which indicated the number of hops to the mobile node via the home access node BS2. Each link in turn along the unicast directed update route is thus directed towards the new access node BS3.

5 Referring now to Figure 7, the UUPD packet is next forwarded to the subsequent node along the unicast updating route, node ER2. Node ER2 is a router which marks the cross-over point between the routing path followed from the transmitting node MH1 to the home access node BS2 and the routing path to be followed by packets transmitted from the node MH1 to the new access node BS3  
10 (the routing path being established). As shown in Figure 8, once the routing protocol data table entries in node ER2 are updated on receipt of the UUPD packets, the cross-over node ER2 has two downstream links, one directed towards the home access node BS2 and one directed towards the new access node BS3. However, because the downstream link directed towards the new access node BS3 includes a  
15 negative  $\tau$  time value, which indicates a (most-recent) mobility-related update, the downstream link directed towards the new access node BS3 is preferentially selected as the next-hop forwarding link. Data packets arriving at node ER2 directed to the mobile host MH2 are forwarded to node IR2, along the routing path to the new access node BS3. Following the diversion of the routing path at the cross-over  
20 router ER2, no further data packets are forwarded to BS2 and no further data packets are forwarded through the tunnel interface between the node BS2 and the node BS3. However, the tunnel interface remains in place for the time being at the home access node BS2, in order to ensure that no routing update is generated from home access node BS2 (due to loss of all its downstream links) until the UUPD  
25 packet arrives at the home access node BS2. On arrival of the UUPD packet at the

home access node BS2, the tunnel state entries in the routing table of BS2 are removed, thereby tearing down the tunnel interface for MH2.

Referring now to Figure 9, it will be noted that the height of the home access node BS2 is not redefined on receipt of the UUPD packet (however, the link direction between the node BS2 and ER2 is reversed because of the negative  $\tau$  time value defined in the height for node ER2, thus allowing other mobile hosts receiving service via BS2 to transmit packets to MH2), since the home access node BS2 forms the end of the unicast update path.

Finally, on receipt of the UUPD message, the home access node BS2 may transmit an update-complete acknowledgement (UUPD-Ack) towards the new access node BS3. The UUPD-Ack packet follows the unicast-updated routing path established in the DAG towards new access node BS3. On transmission of the UUPD-Ack packet, old access node BS3 relinquishes tentative control for the DAG for the IP address it originally allocated to the mobile node MH2. On receipt of the UUPD-Ack packet, the new access node BS3 takes tentative control of the DAG for the IP address of the mobile node.

The routing update associated with the inter-BS handover of the mobile station at the radio link layer is now complete, involving the redefinition of the height of only a limited number of nodes (In the example shown in Figure 9, only five nodes) along the unicast update path. Furthermore, the updating of routing protocol data table entries is also limited, such updates only being required in the nodes receiving the UUPD message and each immediately adjacent node (which receive an advertisement of the new heights and store the new heights in their routing tables). In the example shown in Figure 9, routing protocol data table updates are also performed in each of nodes IR1, CR1, CR2 and CR3.

Figures 10 and 11 show the state of the DAG within the AS prior to, and following, a subsequent mobility-related update. In this case, the mobile node MH2 is handed over to a further access node BS4 from the access node BS3, to which the mobile node was previously handed over from access node BS2. The procedure employed is the same as that described in relation to the mobility-related update caused by the first handover of the mobile node from access node BS2 to access node BS3, except that the new height generated by the unicast update sent from the new access node BS4 include a further increment in the negative  $\tau$  time value (which is increased in magnitude to -2), to differentiate the mobility-related updated heights caused by the second occurrence of mobility from the mobility-related updated heights of the first occurrence of mobility (having a  $\tau$  time value of -1), and from the mobility-related updated heights from the heights assigned in the pre-computed DAG (having a  $\tau$  time value of 0). As shown in Figure 1, the nodes involved in the new update initially have heights including a  $\tau$  time value of 0, indicating that the heights are as defined in the pre-computed DAG.

A further example of mobility-related routing updating, in which the mobile node is (as in a GSM cellular radio system) capable of communicating only via a single wireless link at any particular time, will now be described with reference to Figures 12 to 16. In this case, the steps described in relation to Figures 2 to 4 in the previous example are identical. As shown in Figure 12, the UUPD packet sent from the new access node BS3 is generated in response to receipt of a TIN packet along the tunnel interface.

Referring now to Figure 13, the mobile node MH2 first loses its wireless link with the home access node BS2, and a short time period elapses (to allow for re-synchronisation with the new access node BS3 at the wireless link layer, ETC)

before the new wireless link with the new access node BS3 may be established. During the period that the mobile node MH2 has no wireless links, packets arriving at the home access node BS2 are forwarded by the tunnel interface from the home access node BS2 and are queued at the new access node BS3 until the new wireless link is established. Next, either the new wireless link is established or the UUPD packet arrives at the home access node BS2. If the new wireless link is established first, the new access node BS3 immediately assumes tentative control of the DAG for the IP address of the mobile node. Otherwise, the new access node BS3 waits until it receives the UUPD-Ack message from the home access node BS2. Remaining steps described in relation to the previous example (tunnel tear down, subsequent mobility, etc.) also apply in relation to the present example.

Figures 17 to 25 illustrate a procedure whereby, when a mobile node ends an access session, routing updates are performed which restore the DAG for the IP address of the mobile node to the condition of the DAG before the IP address was originally allocated to the mobile node. The routing update procedure involves routing updates being transmitted to only a limited number of nodes in the AS (along the paths along which unicast mobility-related updates were previously performed), and updates are required in the routing protocol data tables of only a limited number of nodes (the nodes along which the restored directed routing update messages pass and each immediately adjacent node).

Referring to Figure 17, when the mobile node MH2 ends the access session, the current access node BS4 transmits a restore request (RR) to the home access node BS2 for the IP address. This may be achieved by knowledge of the identity of the "home" access node for the IP address at the current access node. This knowledge can be provided by transmitting the identity of the owning BS when

creating the aggregated DAG using the OPT packet update mechanism, and storing that identity as routing protocol data, in addition to the other routing protocol data held in the access nodes. This knowledge may alternately be provided by the mobile node storing the identity of the home BS when its IP address is first allocated, and

5 transmitting this identity to each access node, for temporary storage therein, from which the mobile node receives service during its access session. Thus, when the mobile node MH2 ends this access session, the current access node BS4 transmits the RR packet, initially addressed with the IP address of the mobile node and encapsulated with the IP address of the home access node BS2, along an IP-in-IP

10 tunnel link to the home access node BS2.

As an alternative to requiring knowledge of the identity of the home BS for an IP address, the RR packet may be transmitted with the mobile node's IP address as the destination address, however with an identifier in its header indicating to each forwarding node that the packet is to be routed along the aggregated DAG routing

15 path, which remains directed at the home BS throughout the access session.

In response to receipt of the RR packet, home access node BS2 marks a downstream link in its routing tables to mobile host MH2. This downstream link is a virtual link, since the mobile host is currently not in wireless communications with any access node and is in fact located in a service area of a different access node

20 (that of access node BS4). Any packet arriving at BS4 for the mobile node MH2 following the end of its access session may be forwarded along the tunnel to the home access node BS2, and may be stored for future forwarding to the mobile node MH2 when it begins a new access session.

On receipt of the RR packet, the home access node BS2 also resets the

25 height of the (now virtual) mobile node MH2 to an "all-zero" reference level, and

sends a unicast-directed restore update (UDRU) packets towards the current access node BS4, via the fixed infrastructure of the AS, as illustrated in Figure 18. The UDRU packet is forwarded along a unicast route, which includes only nodes having heights which were previously redefined as a result of mobility-related updating. In the example shown in Figure 18, these nodes are nodes ER2, IR2, ER3, IR3, CR4, IR4, ER4 and BS4.

As the UDRU packet is received at each of the nodes along the unicast path, the TORA heights at each node are reset to an "all-zero" reference level, and the  $\delta$  values of the heights are redefined so as to represent the number of hops to the (now virtual) mobile node via the home access node, in place of the previous entry values which indicated the number of hops to the mobile node via the current access node. This process is illustrated in each of Figures 18 to 22.

In addition to the updating of heights along the unicast update route, the updated heights are advertised to each immediately adjacent node. Any node having a negative  $\tau$  time value in its own height which receives an advertisement indicating the resetting of a negative  $\tau$  time value to 0, as in the case of access node BS3 (as illustrated in Figure 20), also resets its own height to an "all-zero" reference level, defines its  $\delta$  value to indicate the number of hops to the (now virtual) mobile station via the home access node, and generates an advertisement of its own new height and transmits it to all of its own neighbours. Any neighbours receiving an advertised new height which do not reset their own height do not propagate the advertisement any further.

As illustrated in Figure 23, once the UDRU packet is received at the current access node BS4, the current access node deletes the state associated with the mobile node MH2 in its routing tables and transmits a UDRU-Ack message, along the

routing path just created by the unicast-update, towards the home access node BS2, thereby relinquishing tentative control of the DAG for the IP address previously used by the mobile node MH2.

As shown in Figure 24, the UDRU-Ack packet eventually propagates to the home access node BS2. On receipt, the home access node BS2 removes all state associated with the mobile node MH2 and assumes control of the DAG for the IP address. The IP address may then once again be dynamically allocated, to a different mobile node MH3 starting an access session in the service area of the access node BS2, as shown in Figure 25.

In summary, the following modifications, which may be used alone or in any combination, to a routing protocol provided by the present invention include:

1. Storing distinctive routing protocol data ("negative" height reference levels in the case of the TORA protocol) generated as a consequence of mobility, so that packets are forwarded towards the most recently-assigned downstream neighbour.

2. Incorporating unicast-directed mobility updates to adjust routing on handover by altering routing protocol data stored in only a limited set of the nodes of an AS.

3. Incorporating unicast-directed restoration updates to erase the effects of handover-based mobility ("negative" height reference levels in the case of TORA).

It is to be appreciated that the above-described embodiments are not intended to be limiting, and that modifications and variations will be envisaged by the person skilled in the art.

The above-described embodiments describe a modified routing protocol based on the TORA routing protocol. However, aspects of the invention may be utilised to modify other known routing protocols, such as OSPF, RIP, etc.

Furthermore, although in the above-described embodiments the  
5 infrastructure of the Autonomous System is fixed, it is to be appreciated that one or more of the routers in the infrastructure may be mobile routers, such as used in the field of satellite communications, and other systems in which one or more routers in the infrastructure exhibit long-term mobility. Furthermore, mobile nodes may also be connected to an access node via a movable non-wireless communications link, such  
10 as a plug-in cable connection.



## CLAIMS

1. A method of controlling routing of packets in a packet switching network including an infrastructure of packet switching nodes interconnected by packet transport links, and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said infrastructure for a given network address, said method comprising:

assigning one or more network addresses to a first access node as one or more home addresses of said first access node;

dynamically allocating a first said home address to a first mobile node being served via a communications link by said first access node, at least one routing path in said infrastructure being directed to said first access node for said first home address;

altering routing in said infrastructure when said first mobile node receives service from a second access node by transmitting routing update messages to a limited subset of said packet switching nodes, said subset being localised in the area of a connecting path between said first and second access nodes, such that at least one routing path in said infrastructure is directed to said second access node for said first home address; and

subsequently altering routing in said infrastructure such that at least one routing path in said infrastructure is directed to said first access node for said first home address, and allocating said first home address to a second mobile node being served by said first access node.

2. A method according to claim 1, wherein said routing update messages are originated at said second access node.

3. A method according to claim 1 or 2, wherein said routing update  
5 messages are transmitted to packet switching nodes adjacent to said connecting path whilst propagation of said messages away from said connecting path is limited.

4. A method of controlling routing of packets in a packet switching network including an infrastructure of packet switching nodes interconnected by  
10 packet transport links, and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said infrastructure for a given network address, said method comprising:

assigning one or more network addresses to a first access node as one or  
15 more home addresses of said first access node;

dynamically allocating a first said home address to a first mobile node being served via a communications link by said first access node, at least one routing path in said infrastructure being directed to said first access node for said first home address;

20 altering routing in said infrastructure when said first mobile node receives service from a second access node such that at least one routing path in said infrastructure is directed to said second access node for said first home address; and

when said home address becomes available for re-allocation, altering routing in said infrastructure such that at least one routing path in said infrastructure is  
25 directed to said first access node for said first home address, and transmitting a

routing message to said first access node indicating that said first home address may be allocated to a second mobile node being served by said first access node.

5. A method according to any preceding claim, wherein a plurality of said  
5 home addresses have an aggregated entry in routing data held in a first packet switching node in said infrastructure when said plurality of home addresses have at least one routing path directed to said first access node.

6. A method according to claim 5, wherein when one of said plurality of  
10 home addresses has a routing path directed to a second access node, said aggregated entry in said first packet switching node is not used for routing packets to said first home address.

7. A method according to claim 6 wherein said plurality of home  
15 addresses have an aggregated entry in routing data held in a second packet switching node in said infrastructure when said plurality of home addresses have at least one routing path directed at said first access node, and said aggregated entry in routing data held in said second packet switching node is used for routing packets to said one home address when said one home address has a routing path directed  
20 to said second access node.

8. A method according to any preceding claim, wherein said first and second access nodes are separately located, and a change of service between said first and second access nodes occurs due to mobility of said mobile node and  
25 involves handover of the communications link of said mobile node.

9. A method according to any preceding claim, wherein said first home address is allocated to said first mobile station during an access session, and said subsequent altering step occurs after the access session ends.

5

10. A method according to any preceding claim, wherein said network forms an autonomous system (AS) in an internetwork, said network connectionless routing protocol being an interior gateway protocol (IGP).

10

11. A method according to any preceding claim, wherein said access nodes comprise base stations of a cellular radio communications system.

12. A method according to any preceding claim, wherein said access nodes comprise a network access server of a fixed-line internet access provider.

15

13. A method according to any preceding claim, wherein packets are transmitted along a said routing path by hop-by-hop routing, a routing decision being made at each packet switching node along said routing path.

20

14. A method according to any of claims 1 to 13, wherein said mobile node is a mobile router serving a mobile host using said first home address for communications with one or more other hosts via said network.

15. A method of controlling routing of packets in a packet switching  
25 network including an infrastructure of packet switching nodes interconnected by

packet transport links, and a plurality of access nodes to which a routing path, defined by data held in packet switching nodes located along said routing path, may be directed in said infrastructure for a given network address, said method comprising:

5 routing packets along a first routing path for a first network address, which routing path is one of a first plurality of routing paths directed to a first access node in said infrastructure for said first network address, said first access node serving a mobile node using said first network address via a communications link;

transmitting a directed routing update message to said first access node  
10 from a second access node, to create a second routing path for said first network address, said second routing path being directed to said second access node.

16. A method according to claim 15, wherein said directed update message is a unicast update message.

15

17. A method according to claim 15 or 16, said method comprising handing over the communications link of the mobile node, such that the second access node serves said mobile node; and

routing packets to said second access node via said second routing path.

20

18. A method according to claim 17, wherein said second routing path is one of a second plurality of routing paths directed to said second access node in said infrastructure for said first network address and said method comprises:

transmitting a further directed routing update message to said second access node from said first access node, to create a third routing path for said first network address, said third routing path being directed to said first access node.

5           19. A method according to claim 18, wherein said third routing path is one of said first plurality of routing paths.

20. A method according to claim 18 or 19, wherein said further directed routing update message is transmitted in response to the ending of an access  
10 session for said mobile node.

21. A method according to any of claims 15 to 20, wherein said first plurality of routing paths are precomputed in said network, and said second routing path is created in response to mobility of said mobile node between said first and  
15 second access nodes.

22. A method according to claim 15 or 16, wherein said directed routing update message is transmitted when an access session for said mobile node ends.

20           23. A method according to claim 21 or 22, wherein said second routing path corresponds to a routing path precomputed in said infrastructure for said first address prior to the start of said access session.

24. A method according to any of claims 15 to 23, wherein said routing  
25 protocol is a link reversal routing protocol.

25. A method according to any preceding claim, wherein said network address is an Internet Protocol (IP) address.

5        26. A method according to any preceding claim, wherein said communications link is a wireless link.

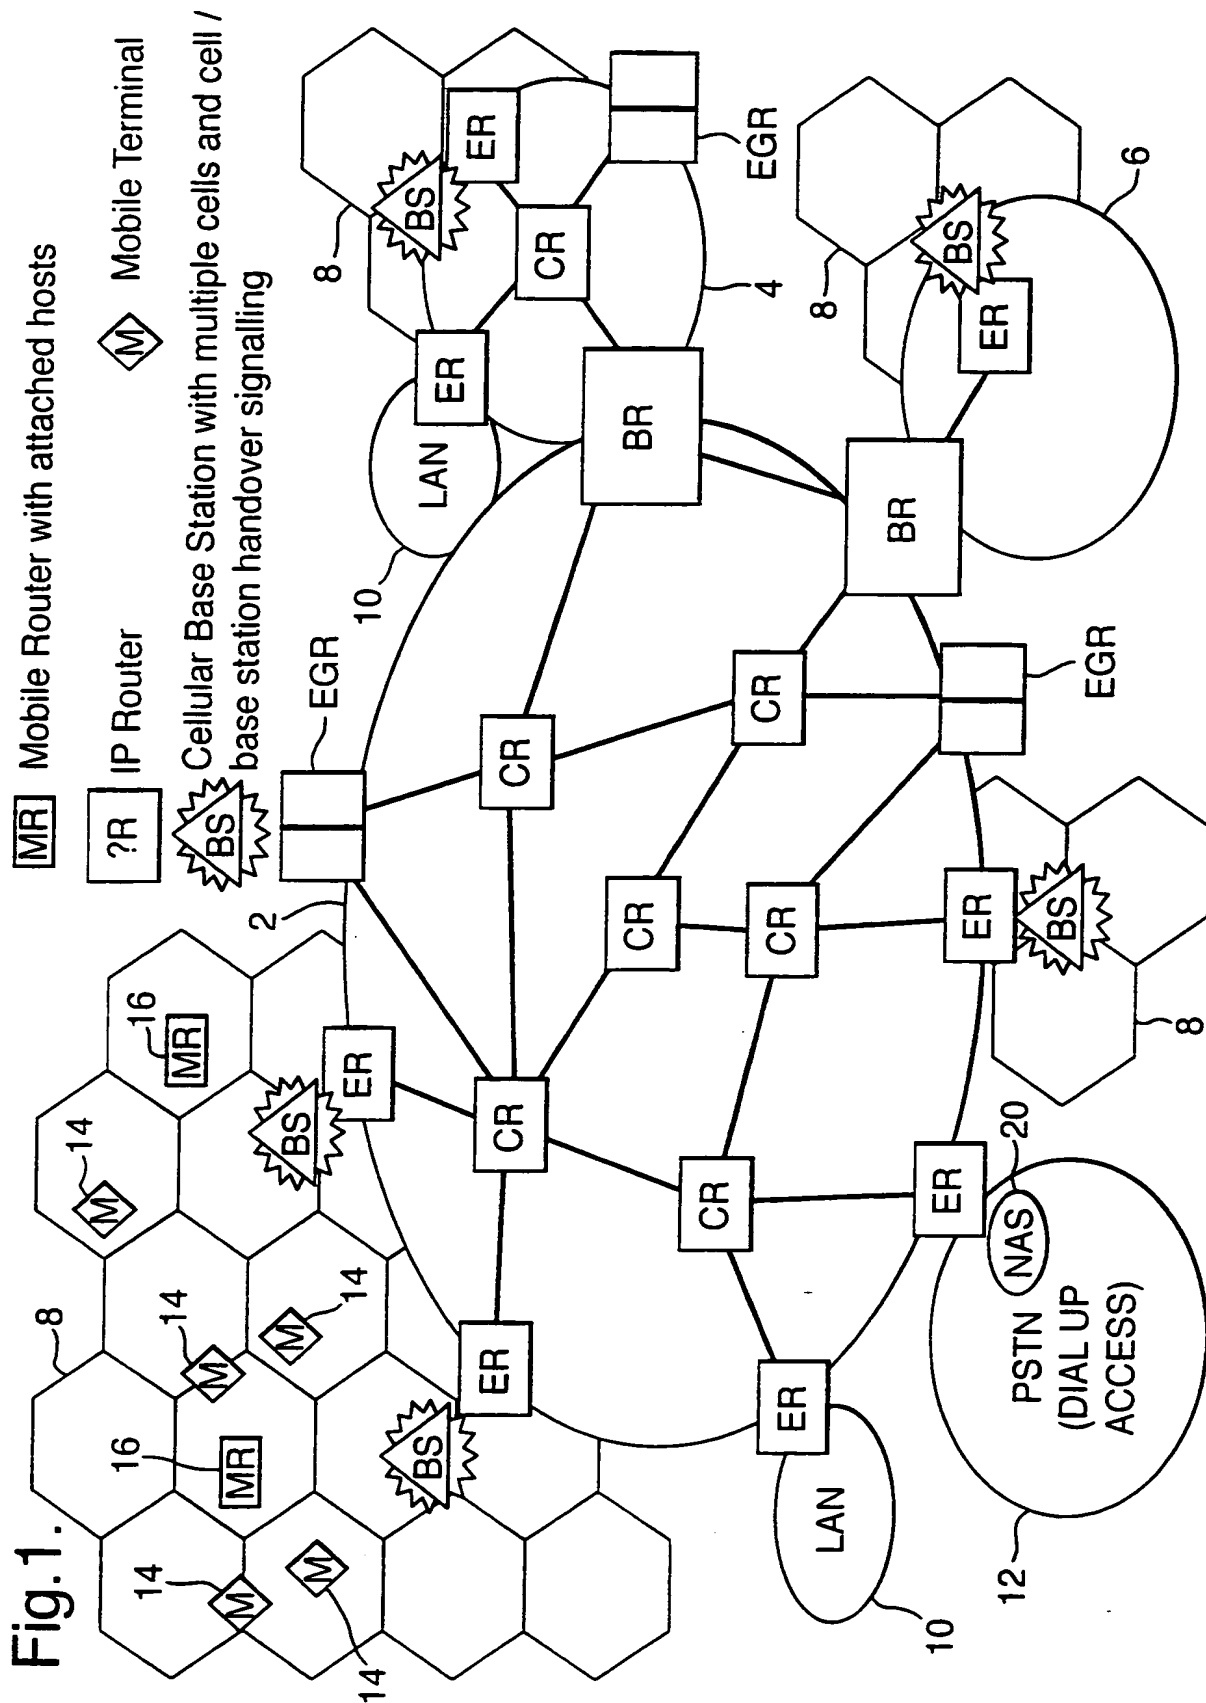
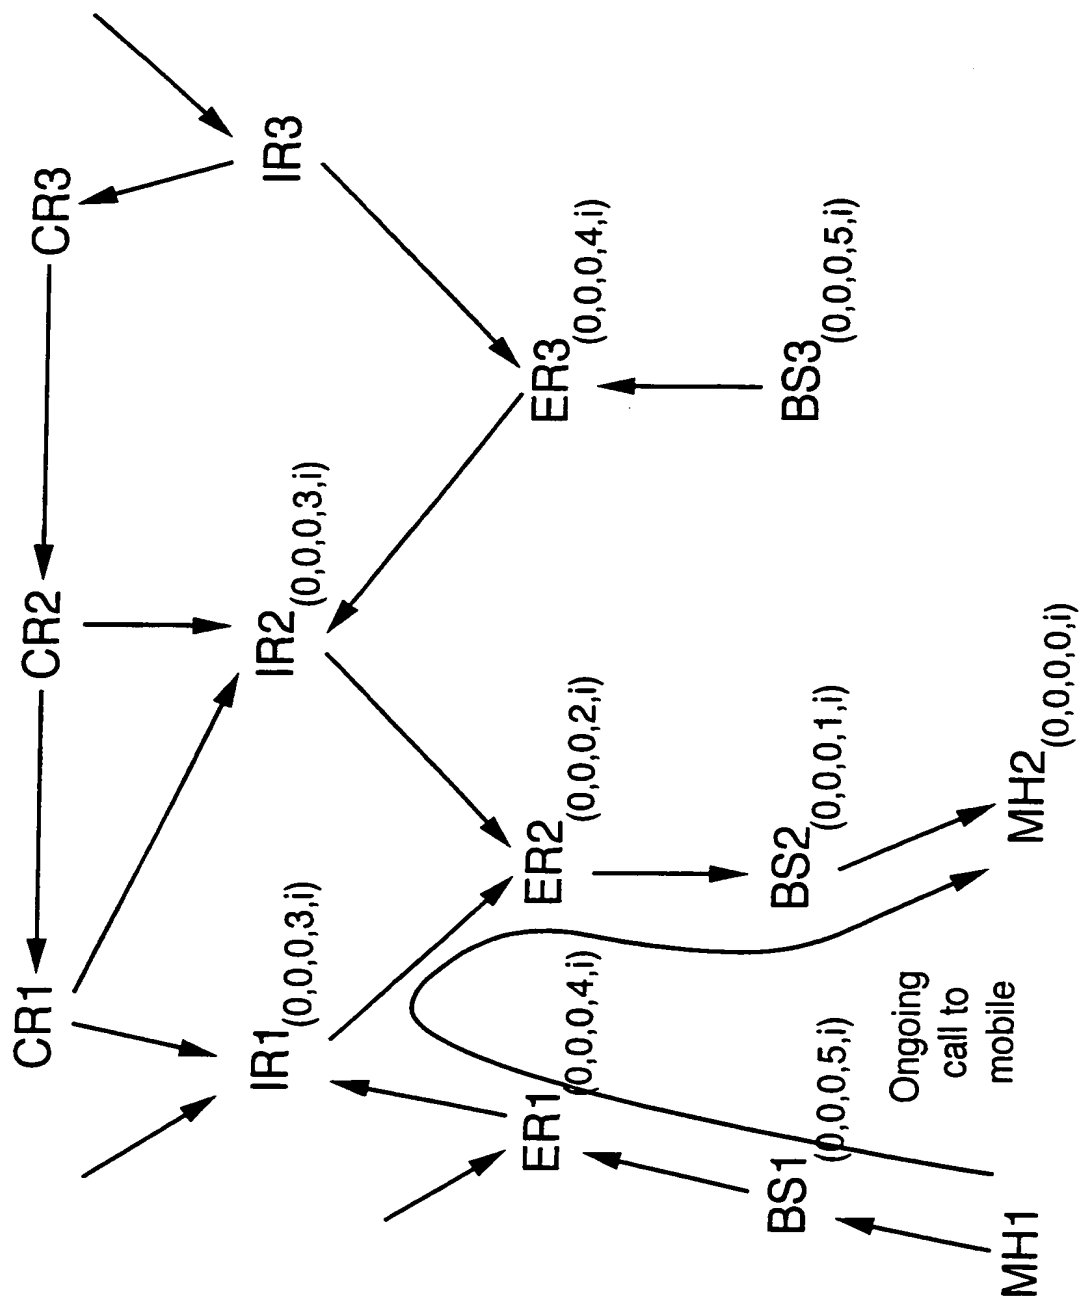
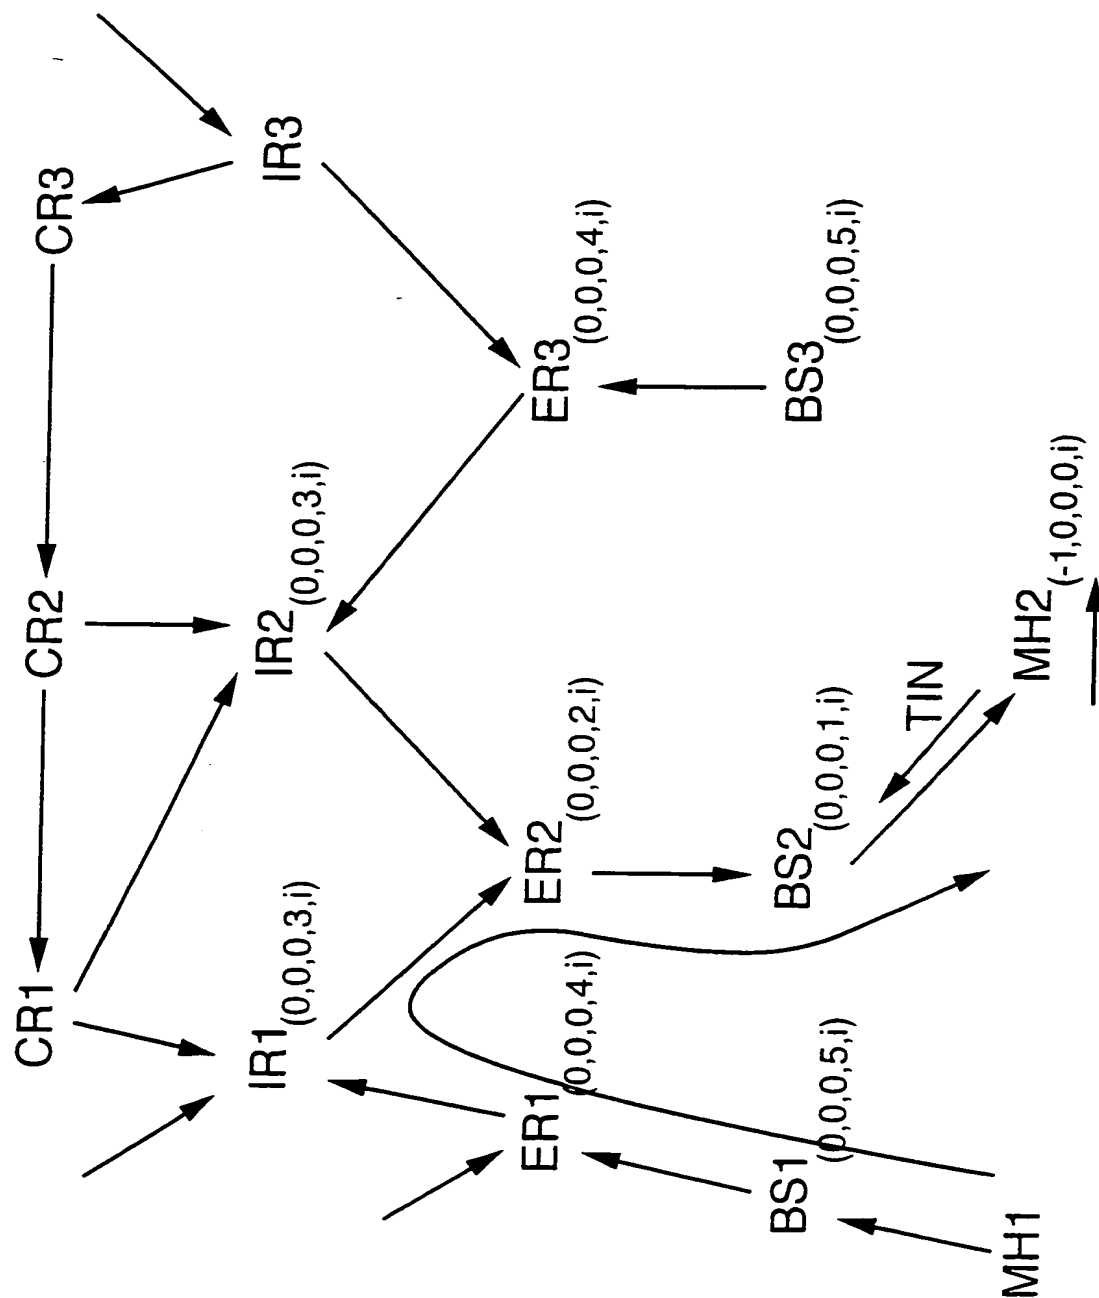




Fig.2.

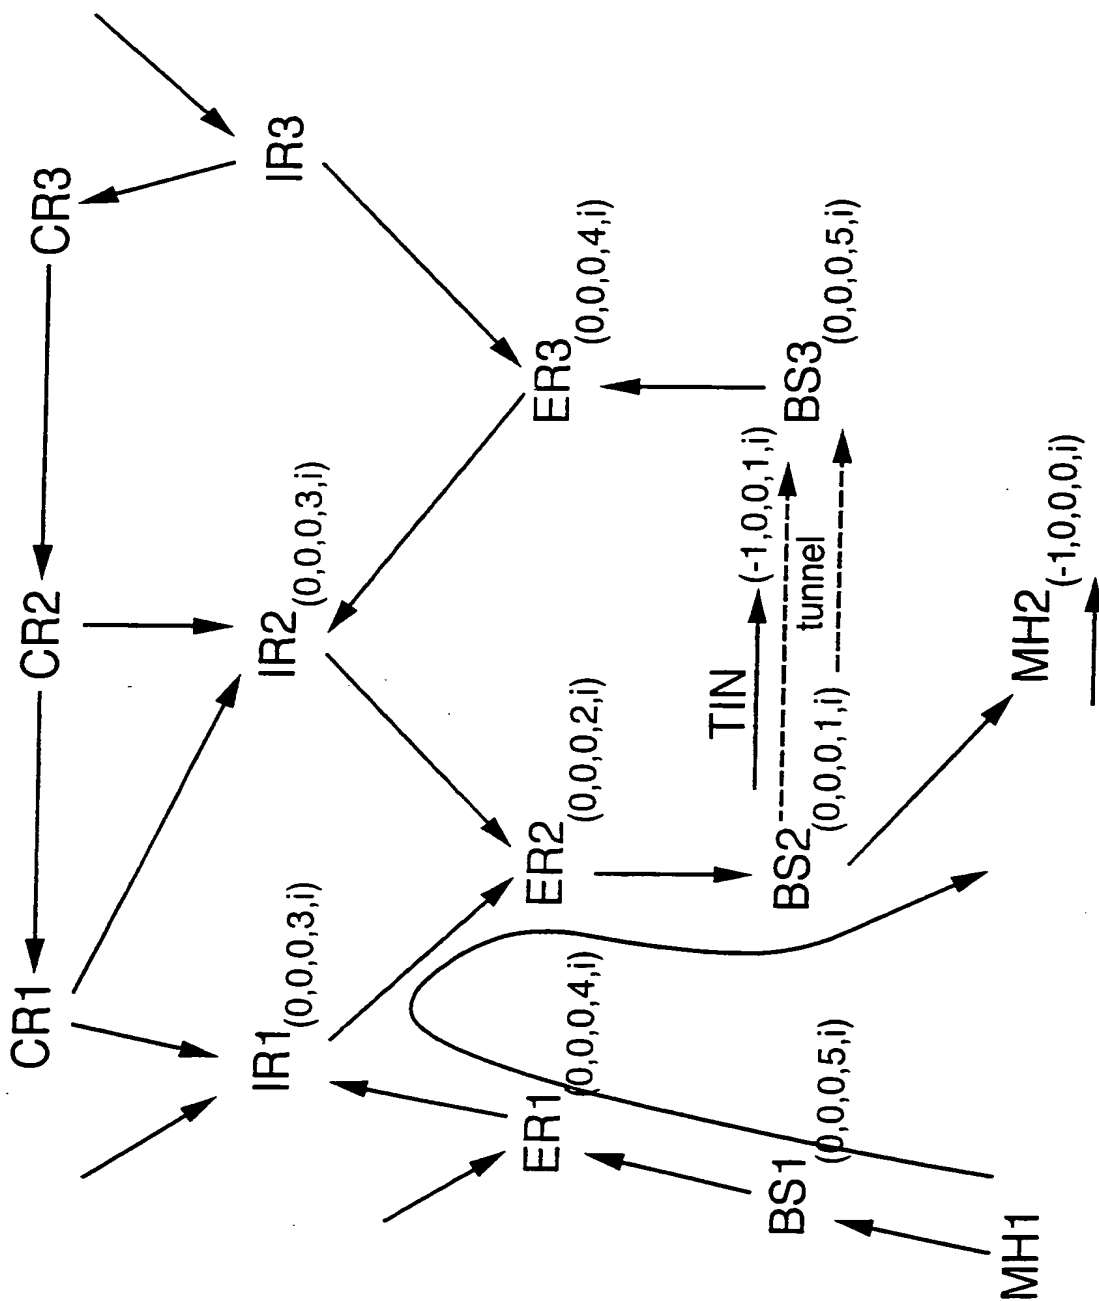


**Fig. 3.**



4/26


Fig. 4.






6/26

Fig.6.

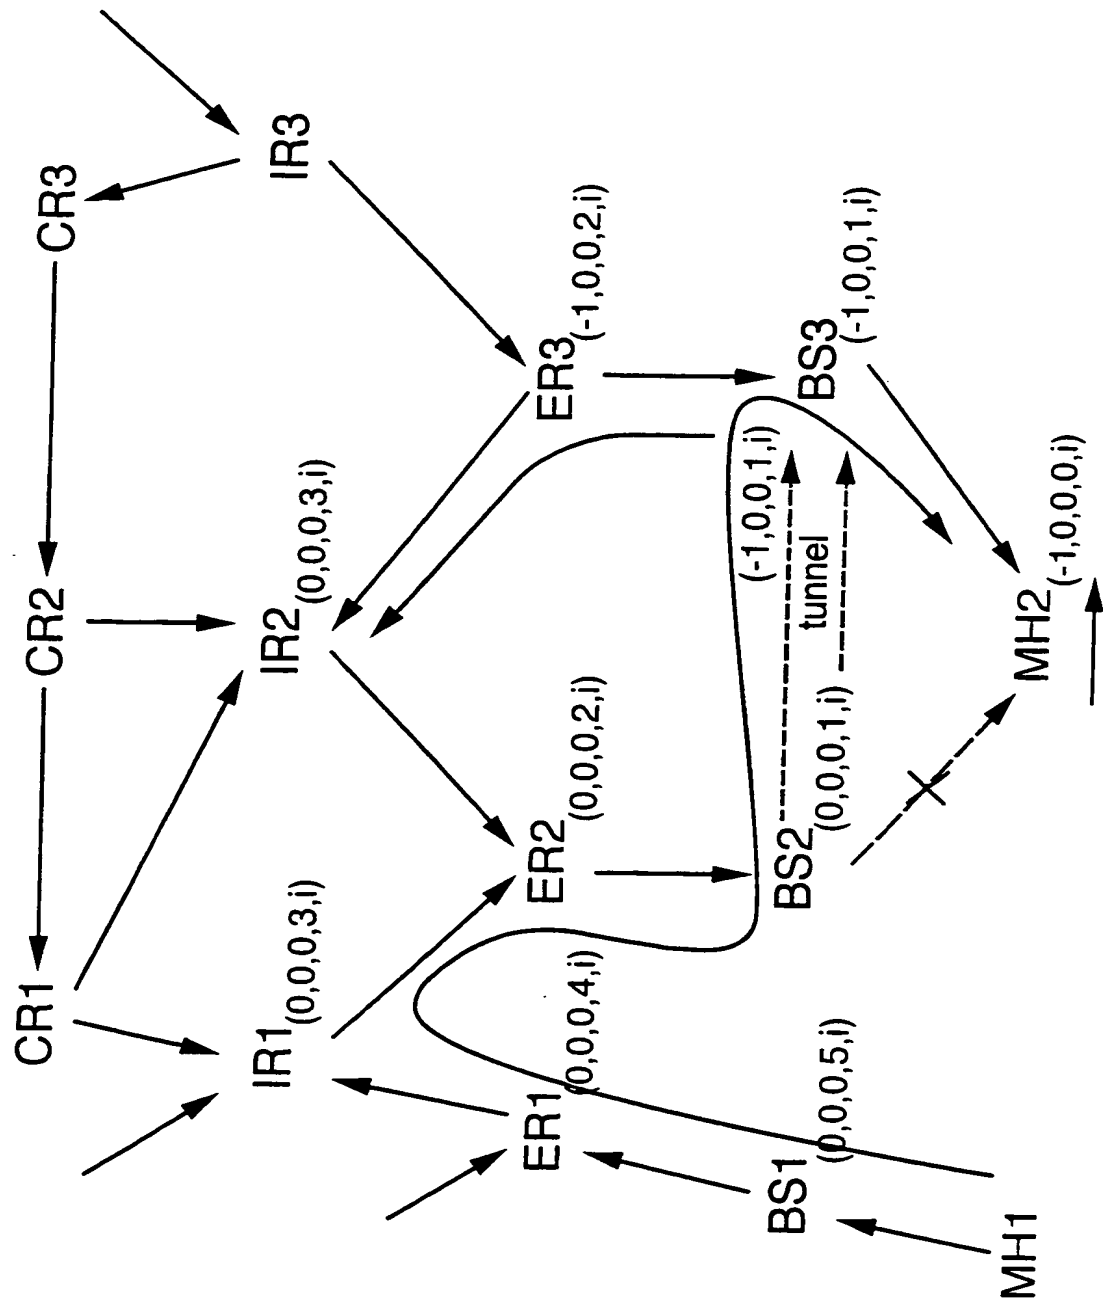


7/26

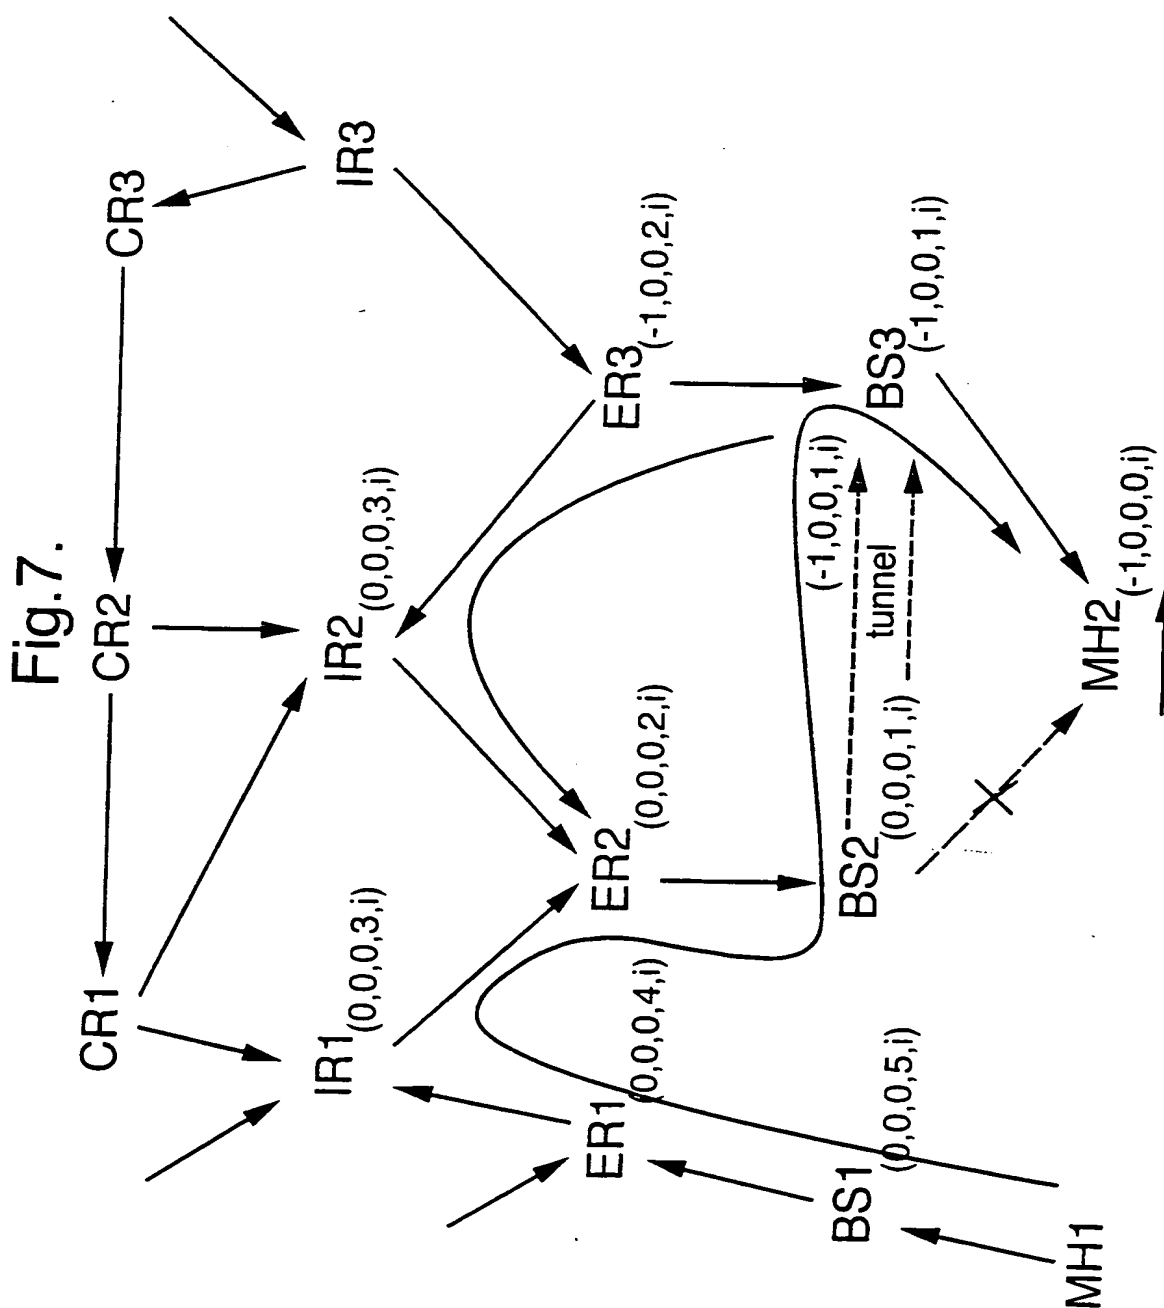


8/26

Fig.8.

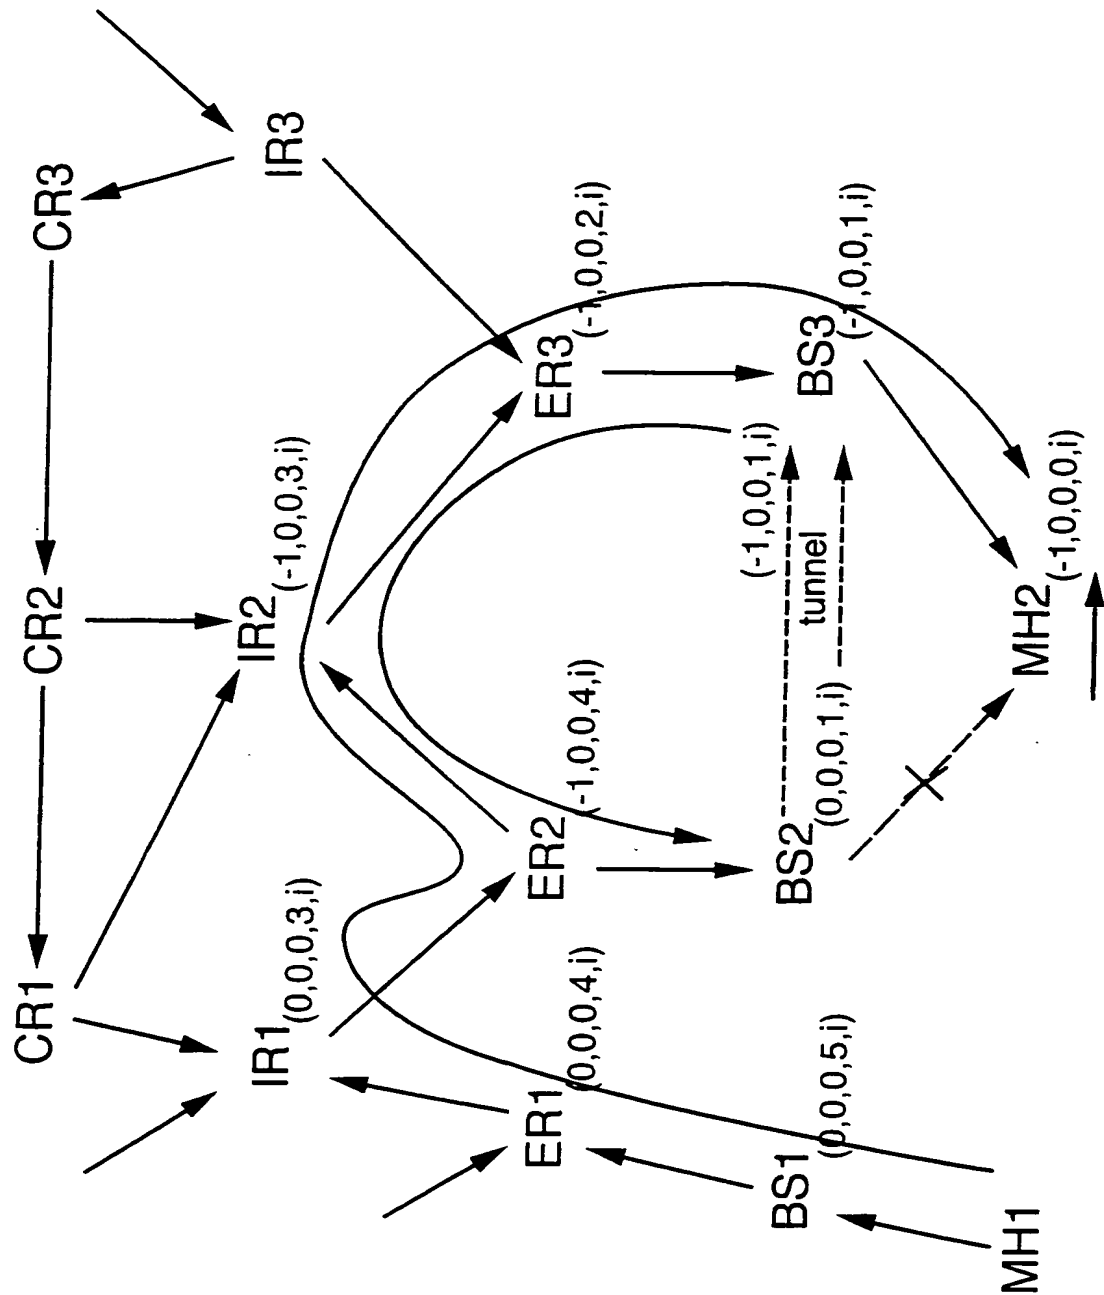

9/26


Fig. 9.

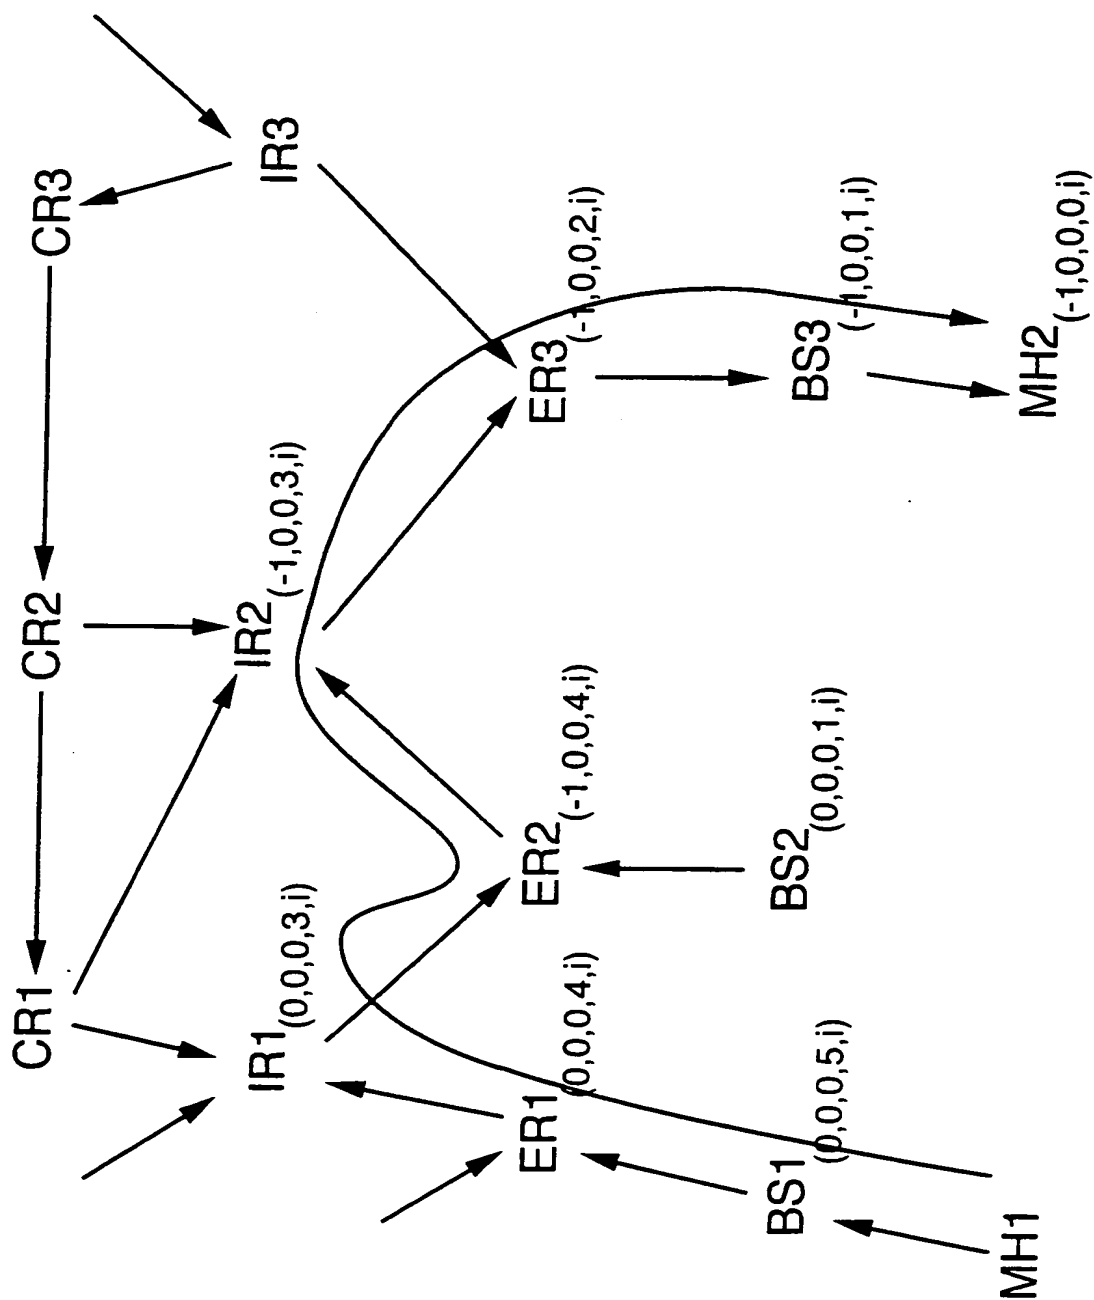




10/26

Fig.10.

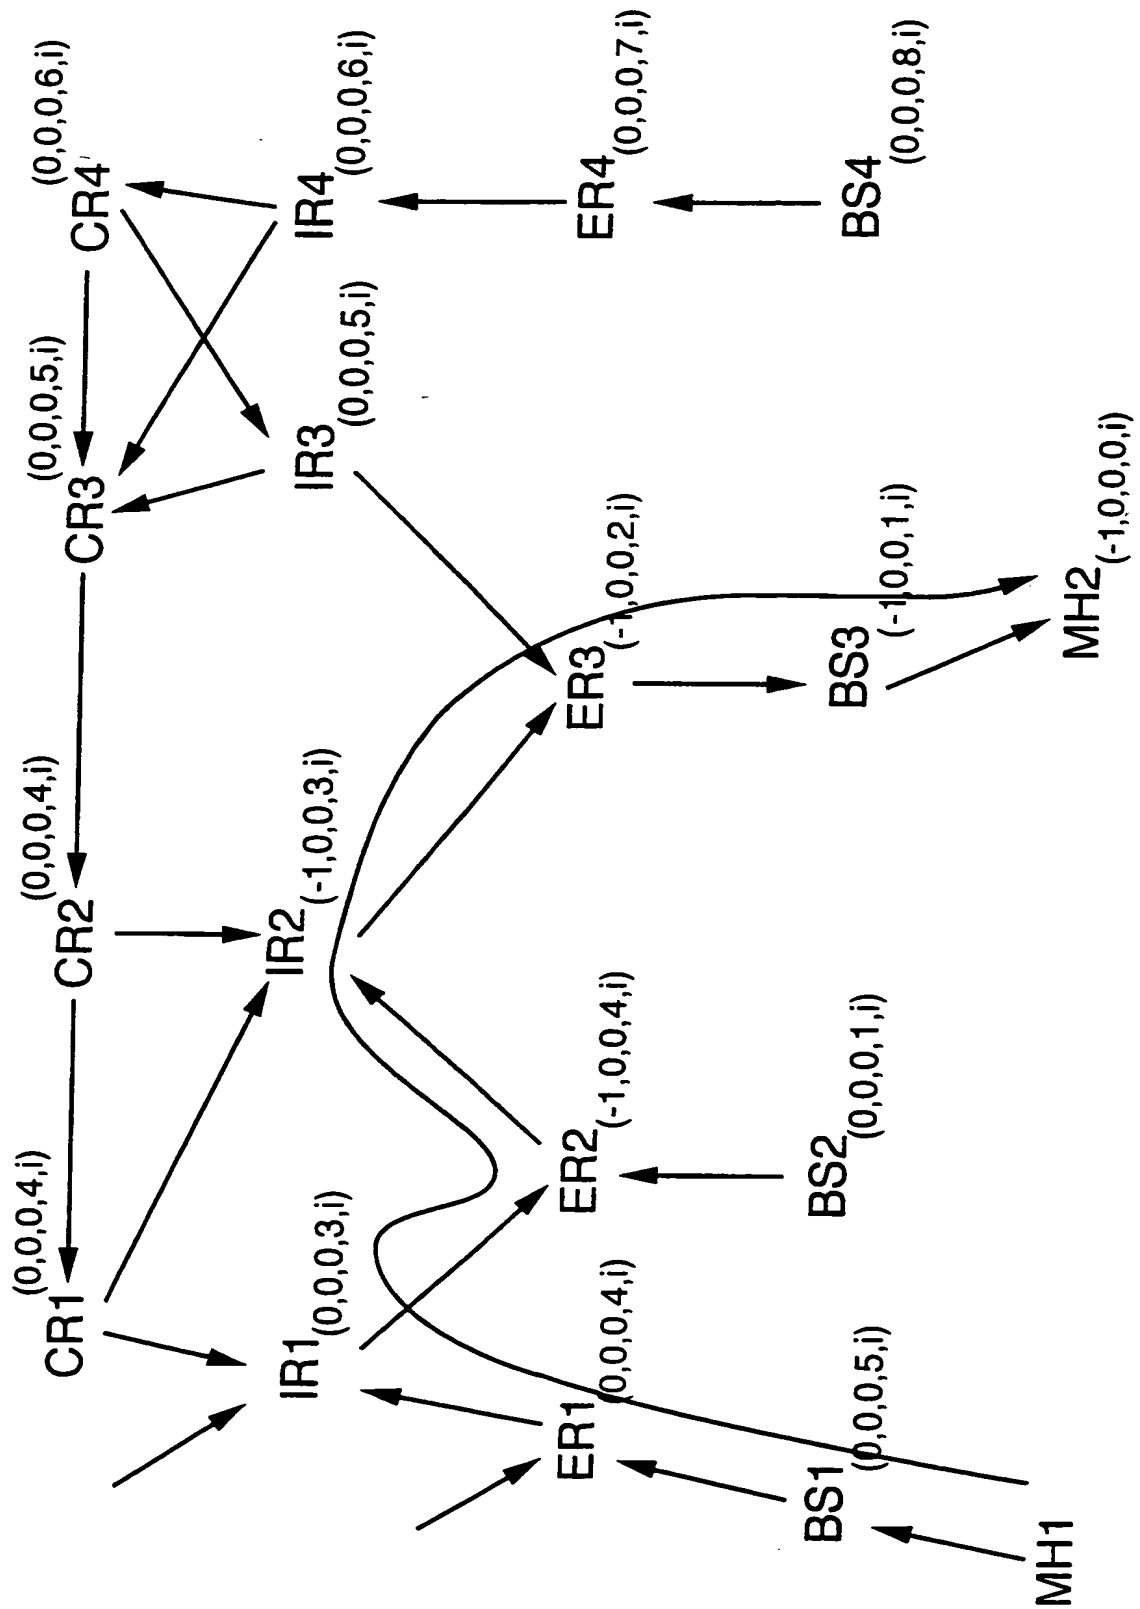

11/26

Fig. 11.

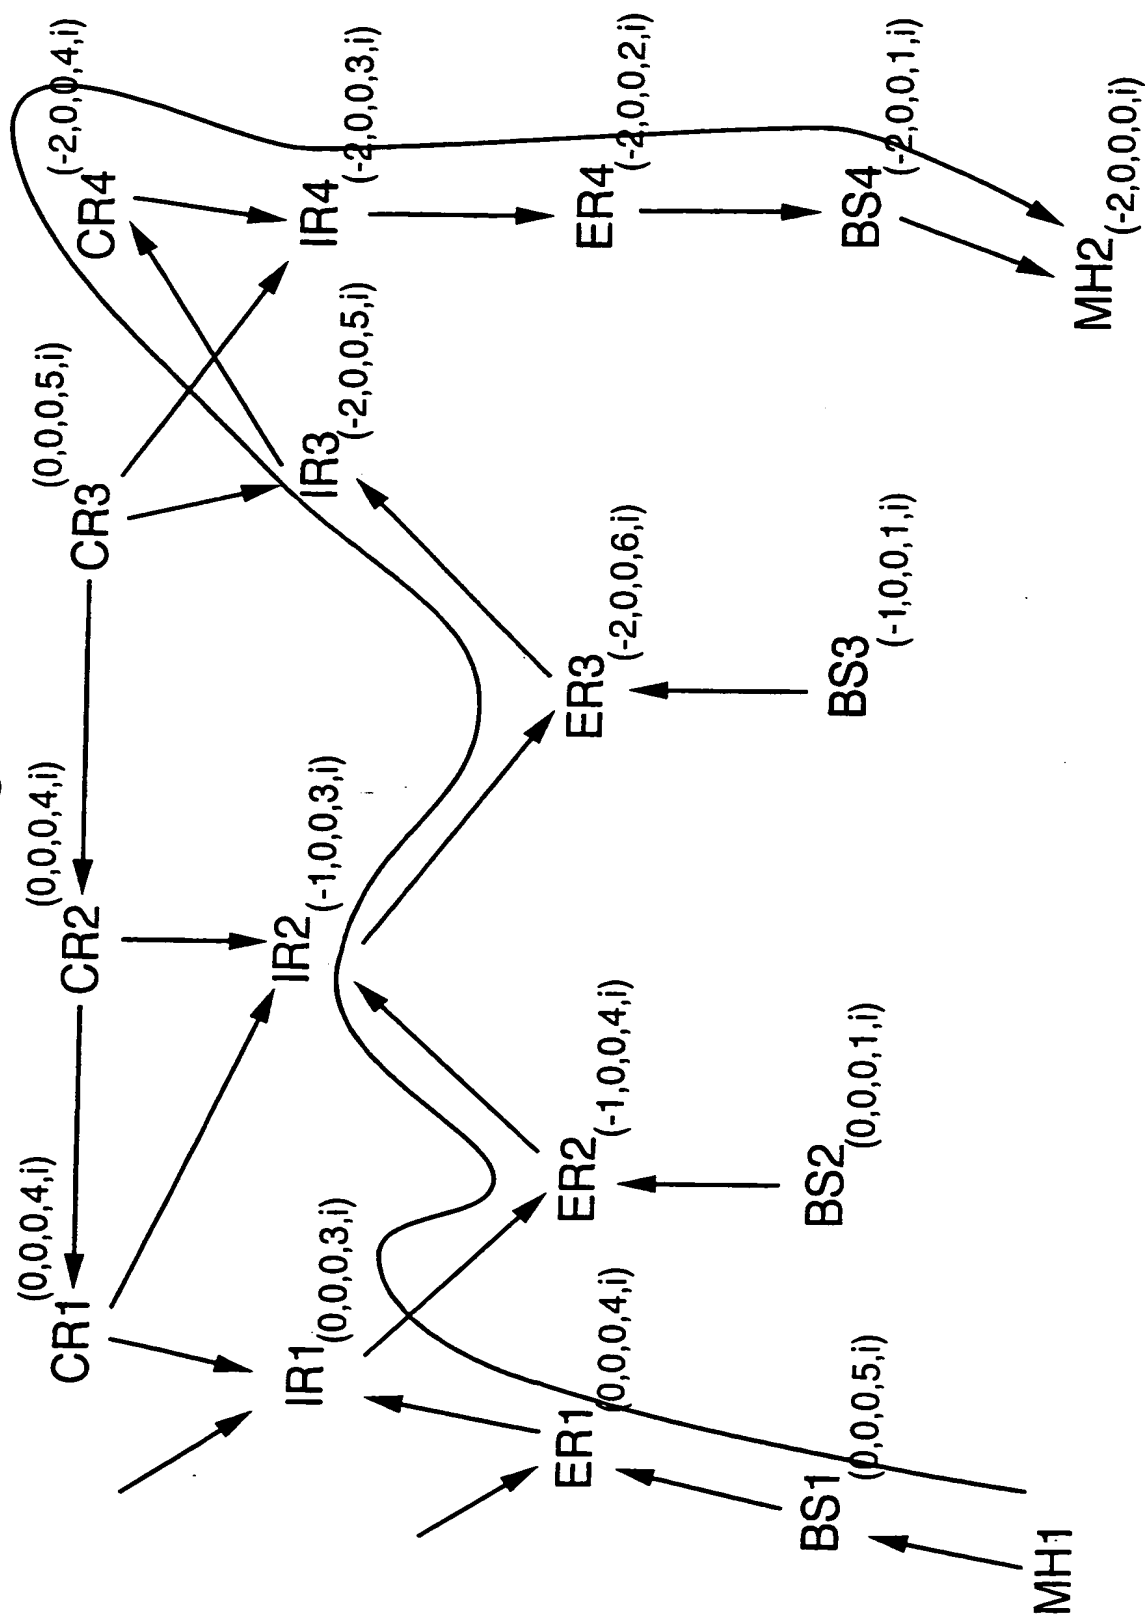

12/26

Fig.12.


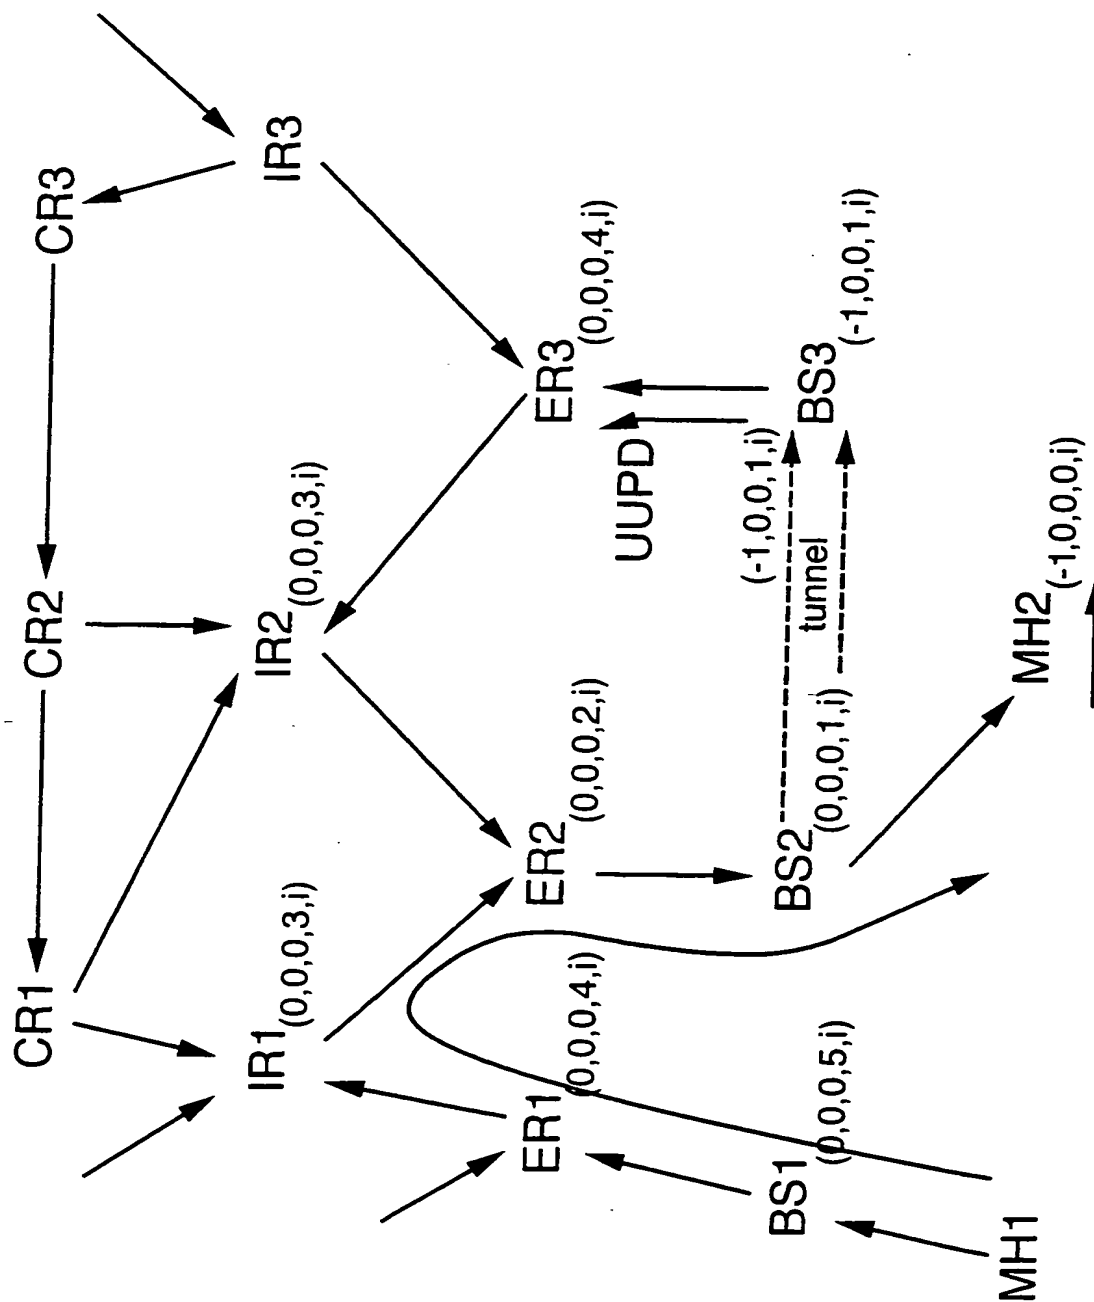


Fig. 13.

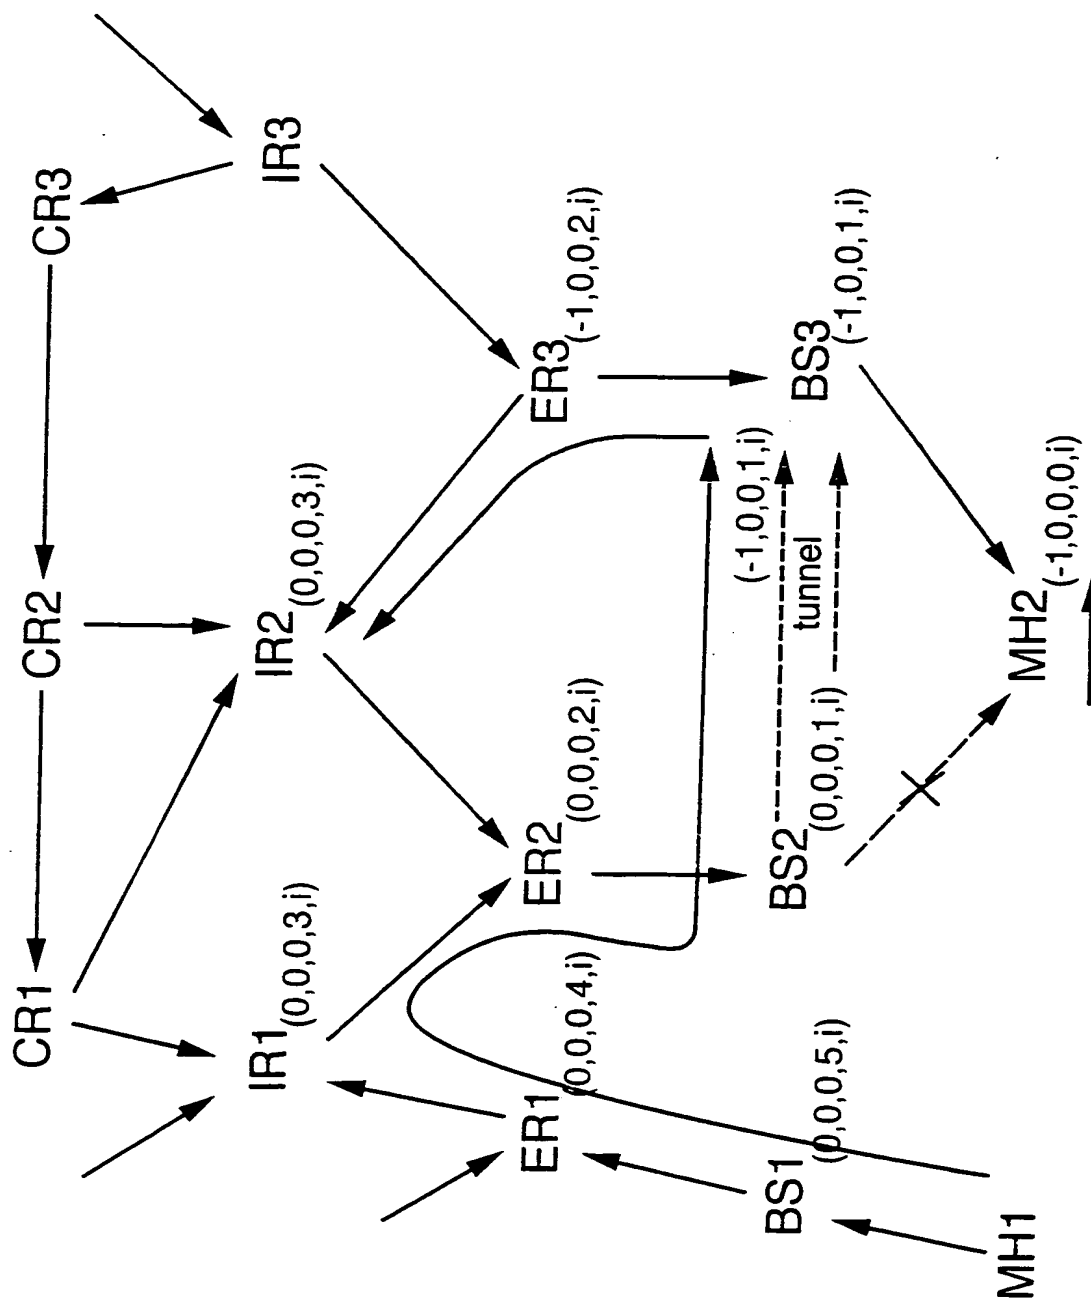

14/26

Fig.14.

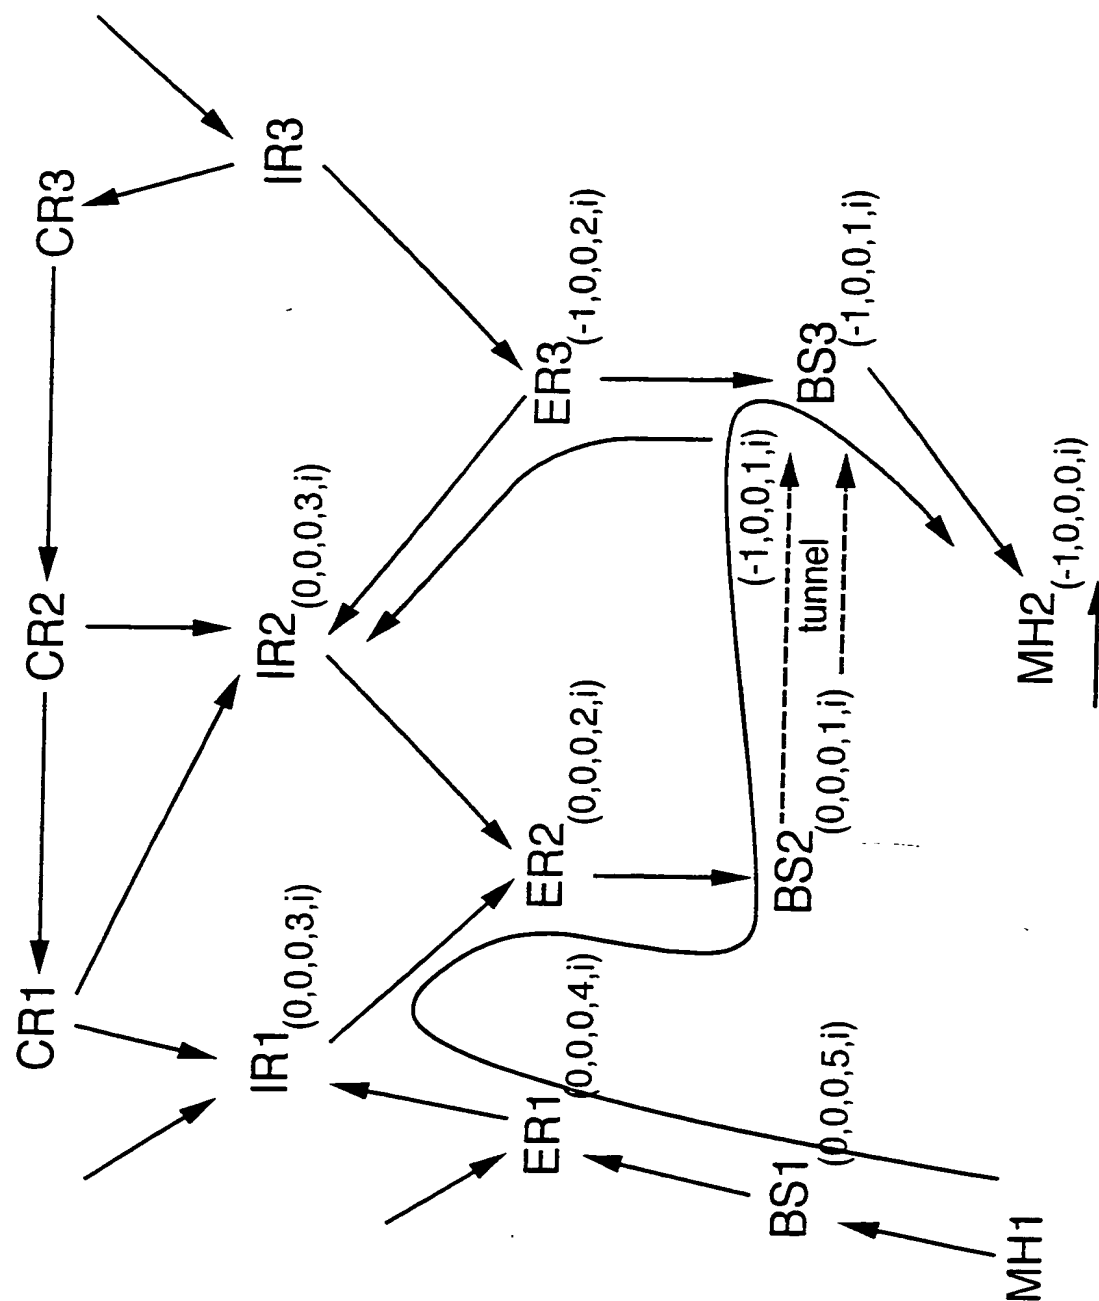


Fig. 15.


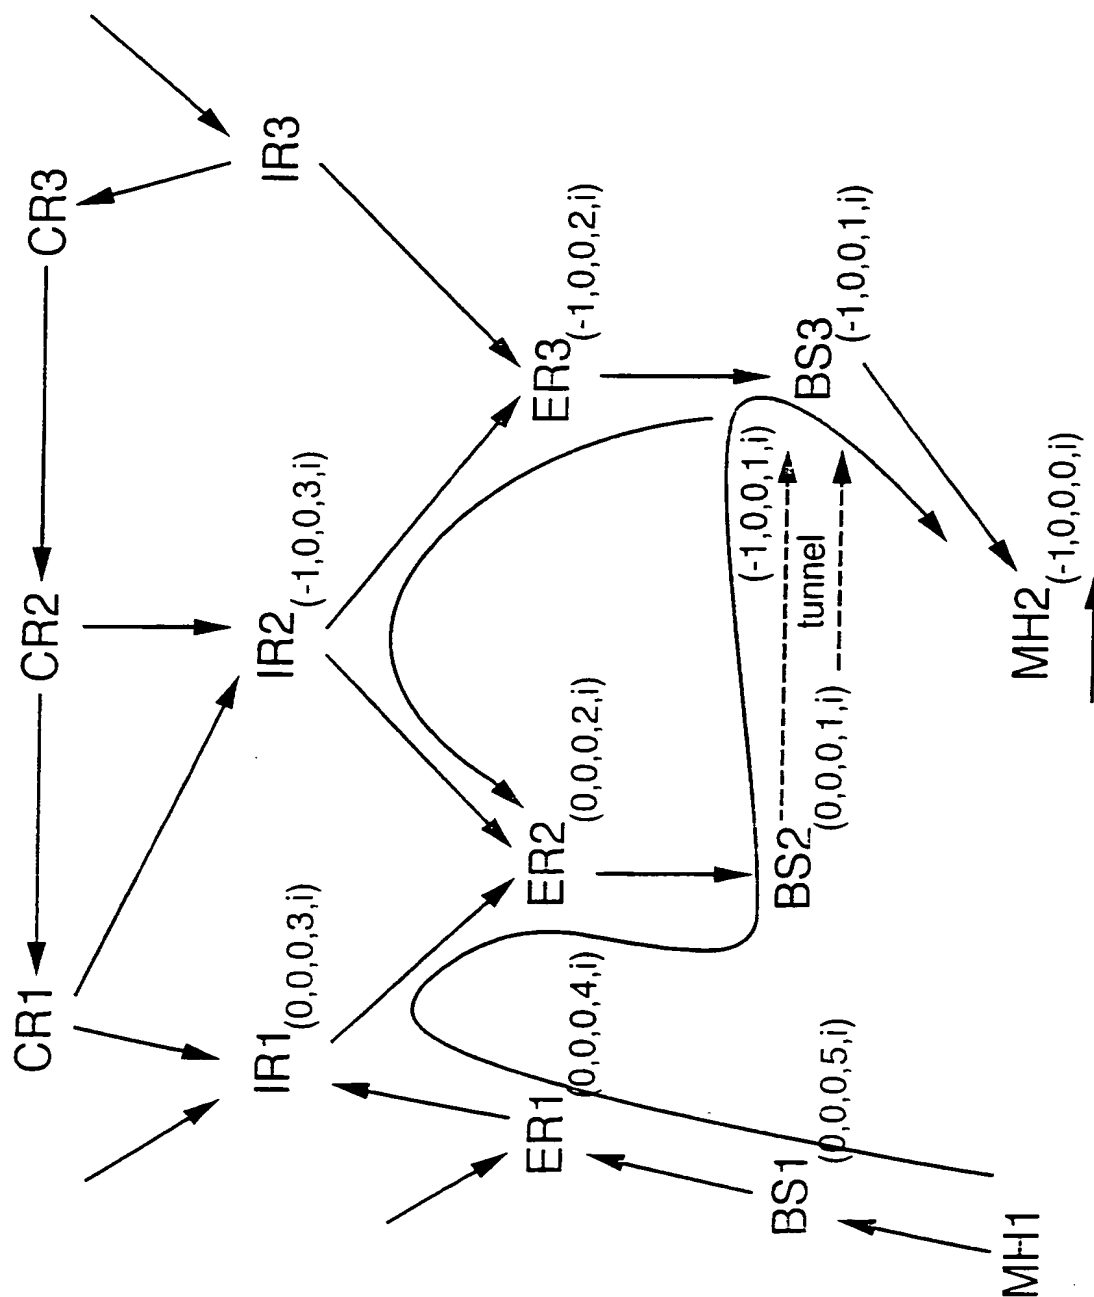


Fig.16.

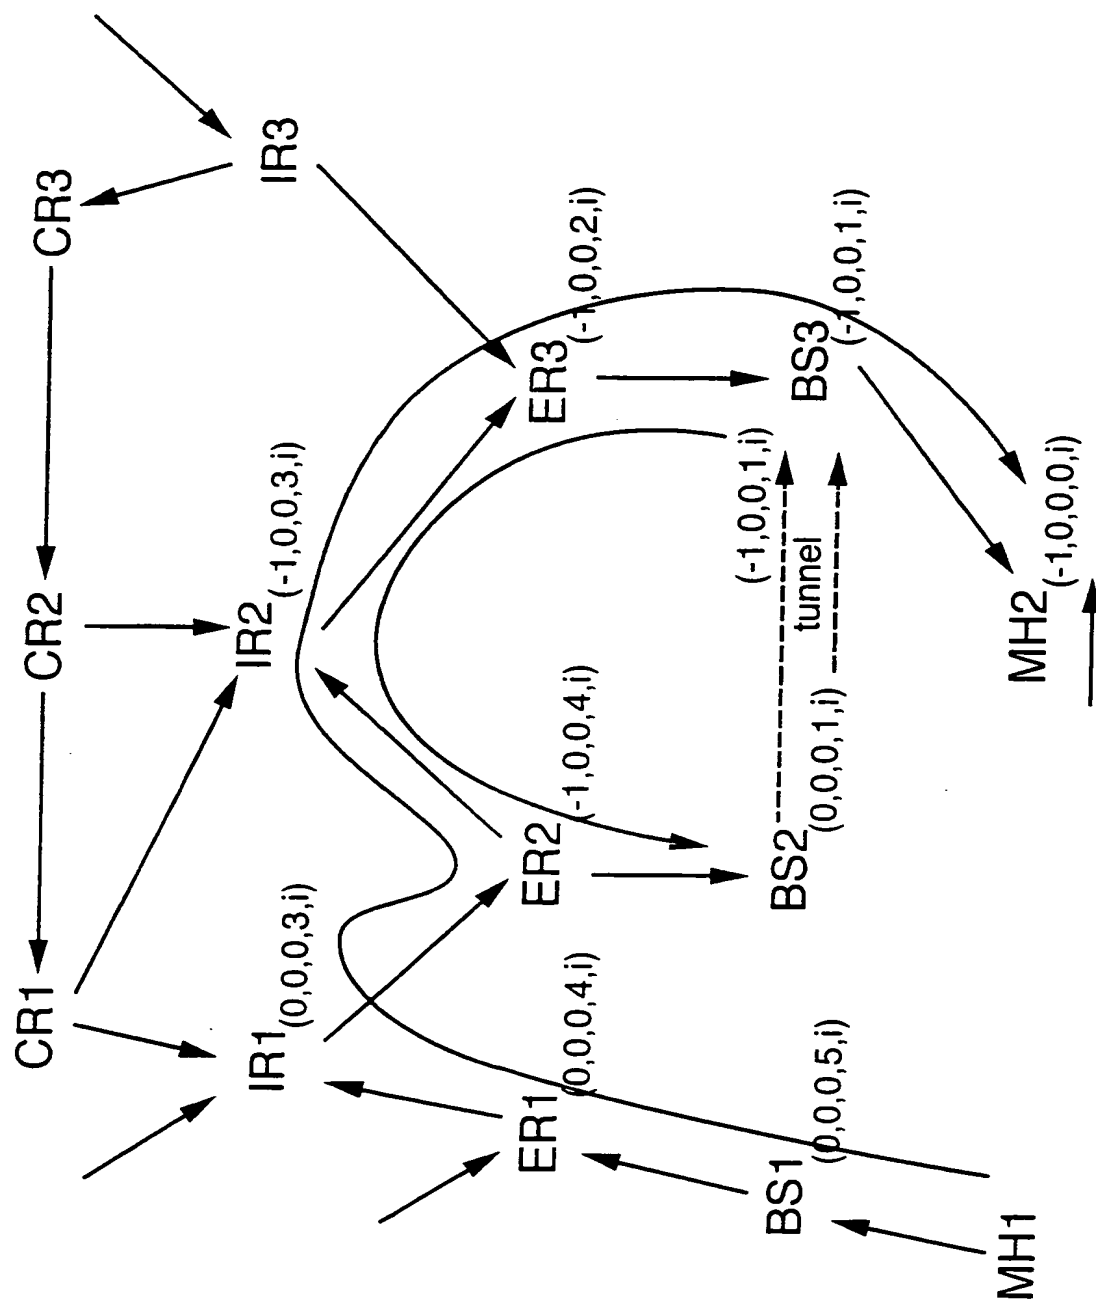

17/26

Fig.17.

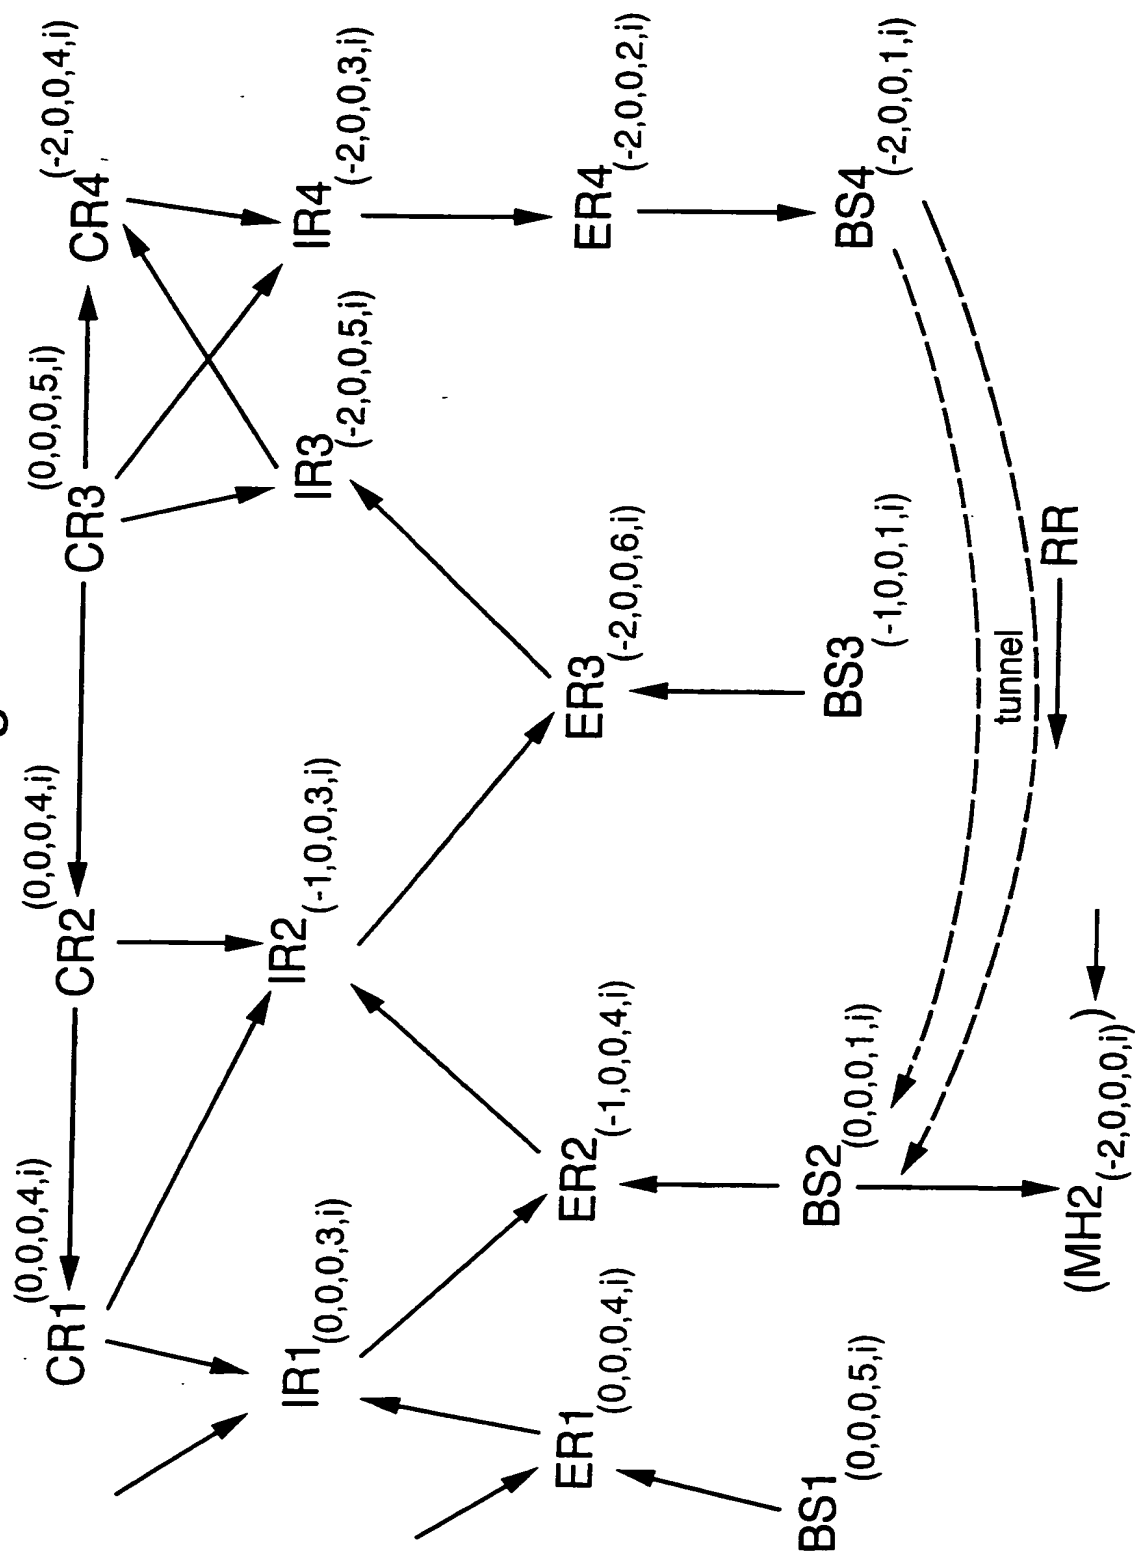
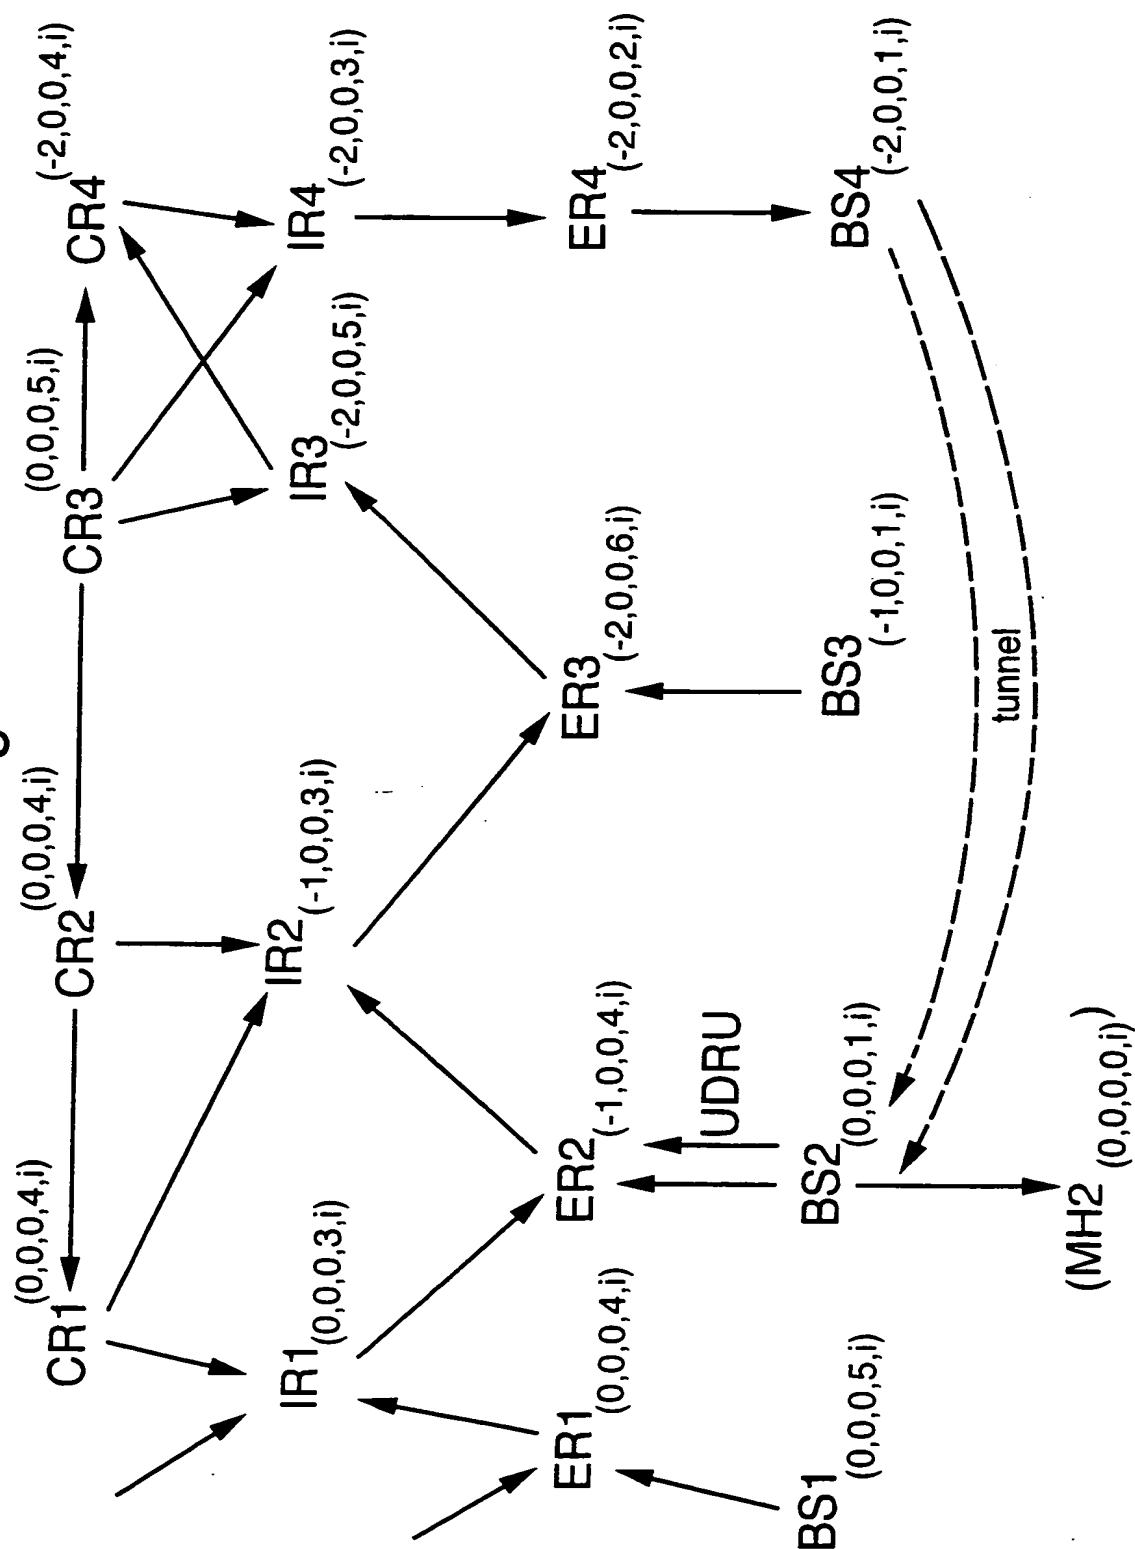




Fig.18.





**Fig. 20.**

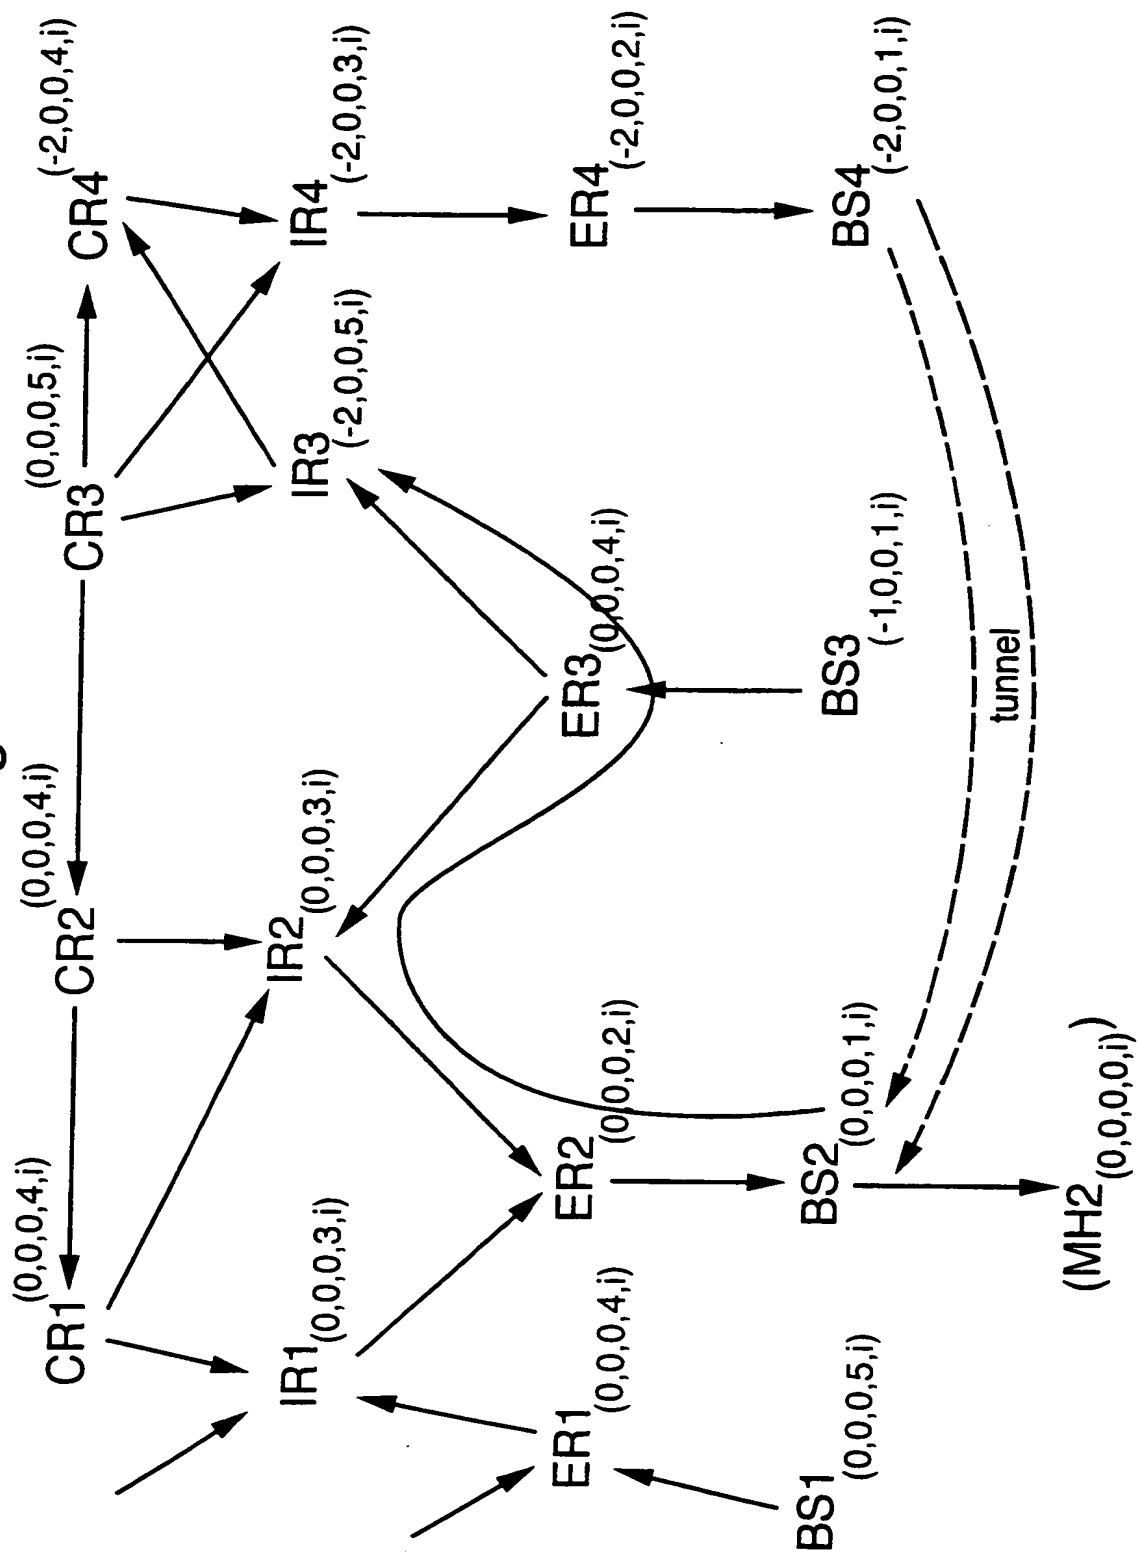


Fig.21.

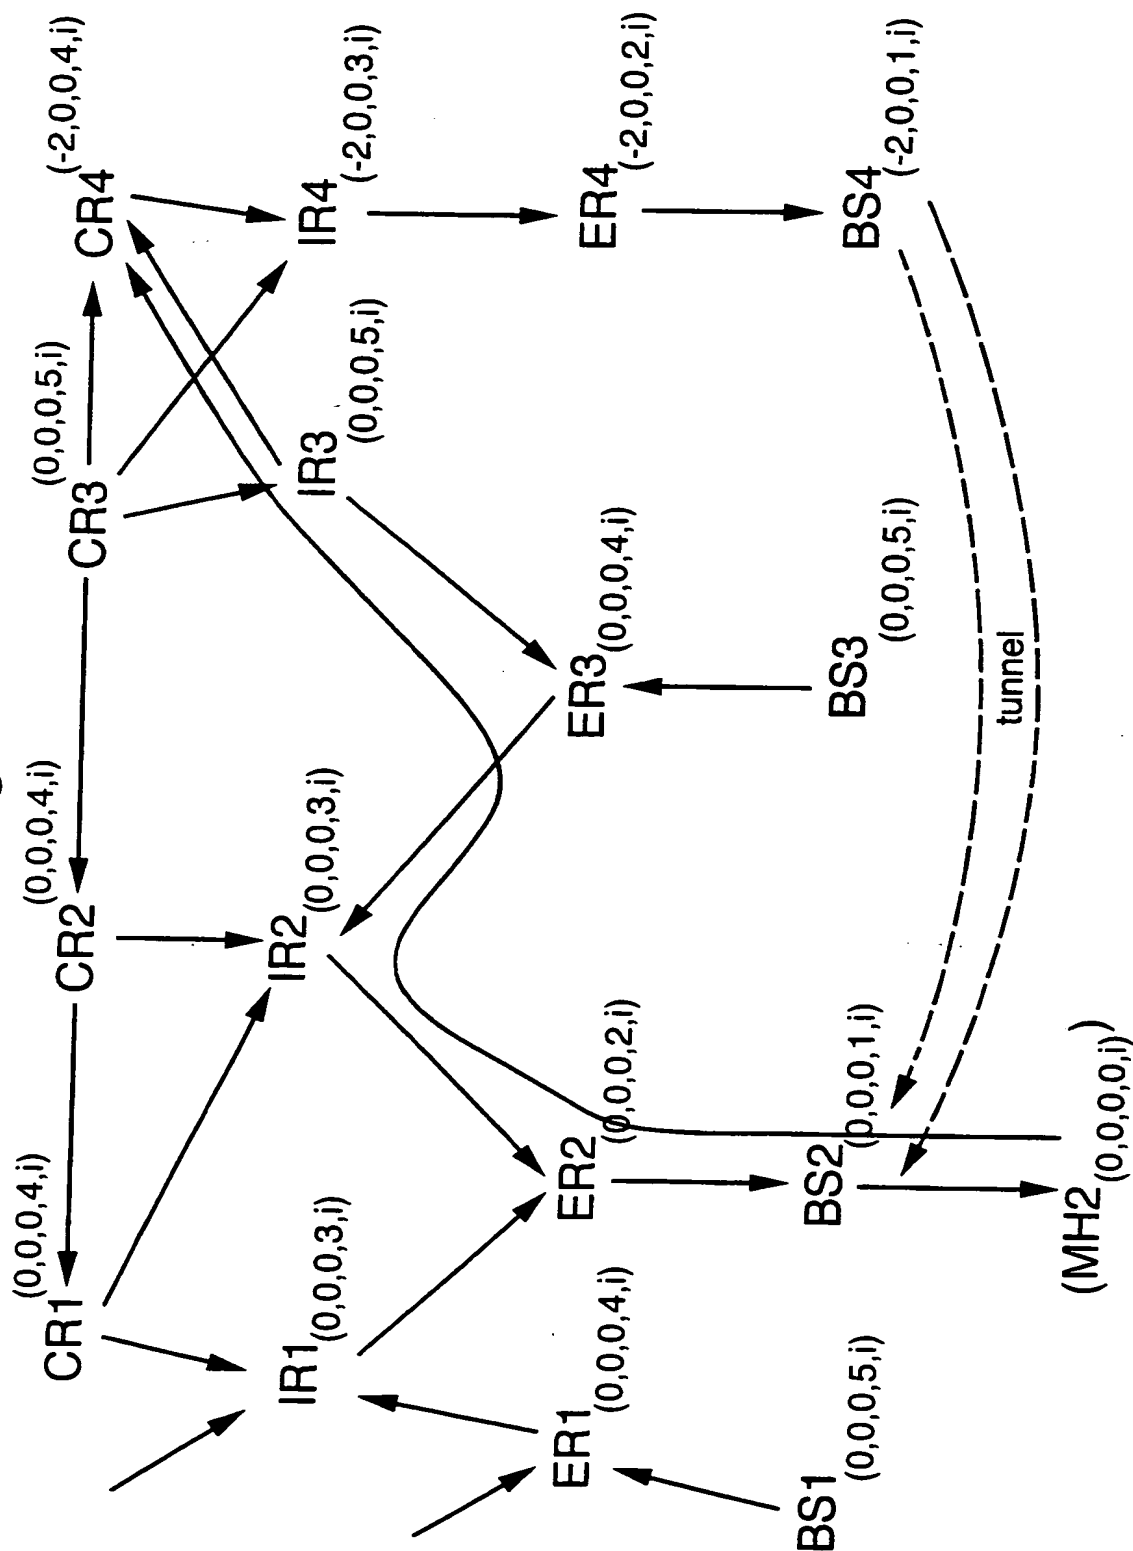




Fig.23.



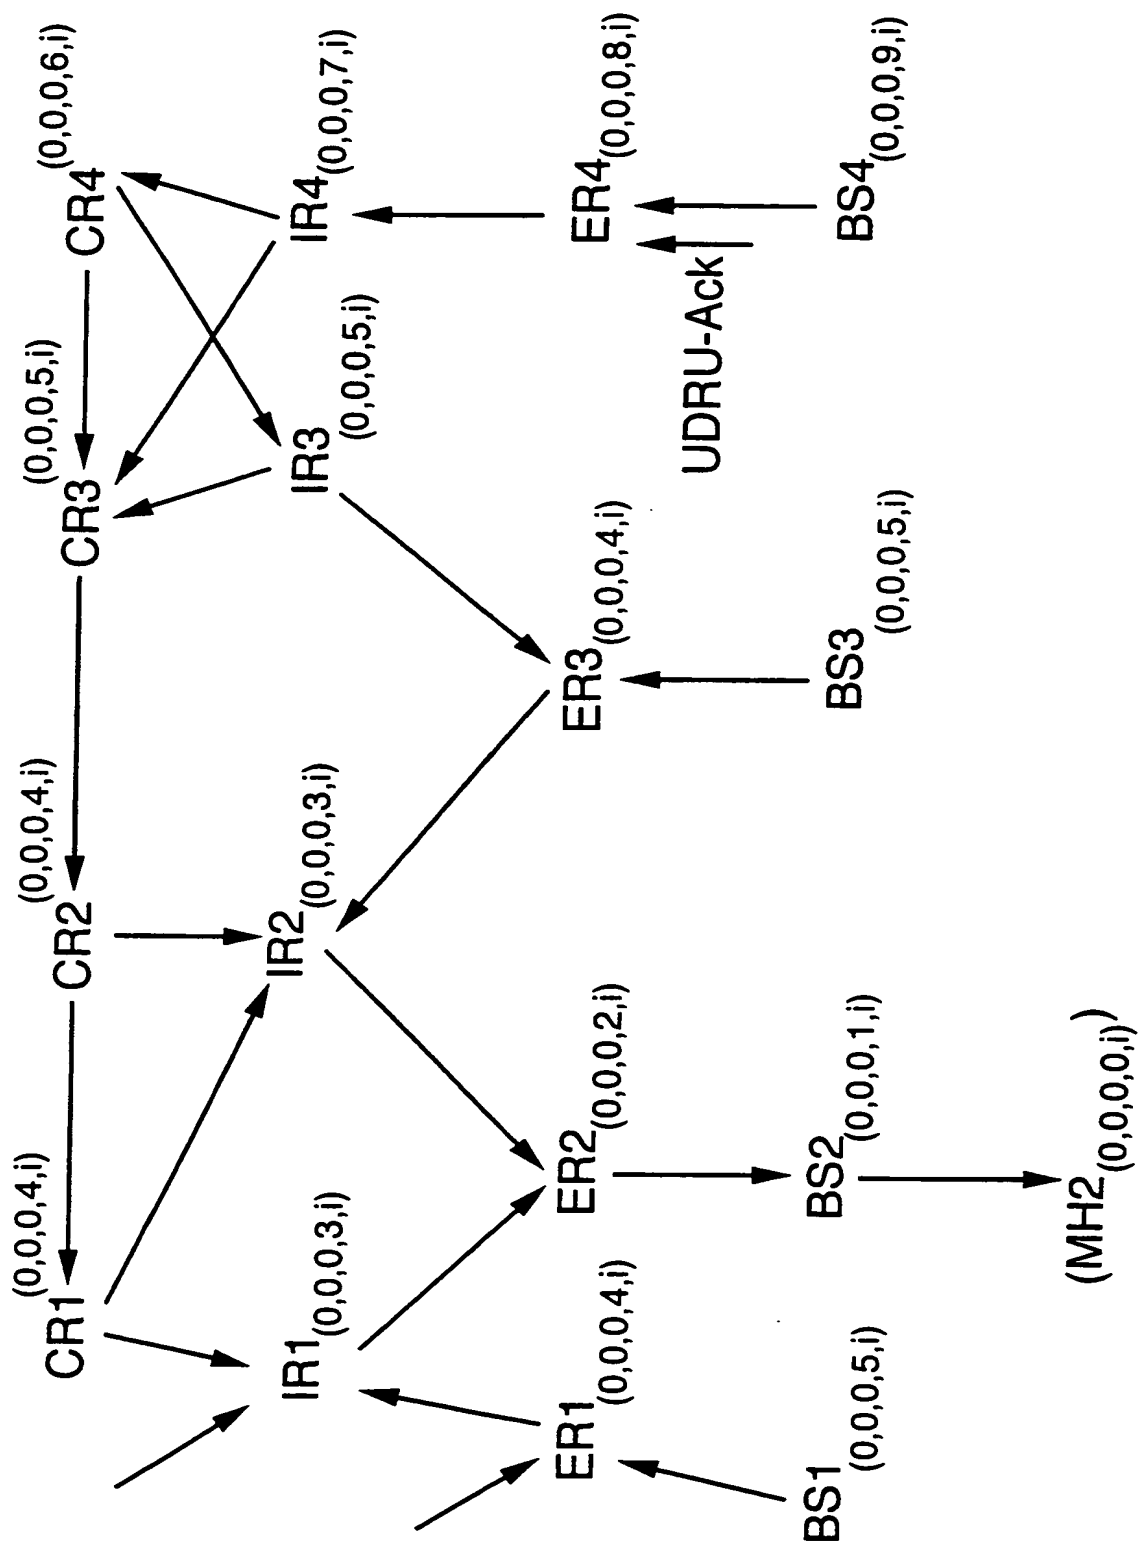


Fig.24.

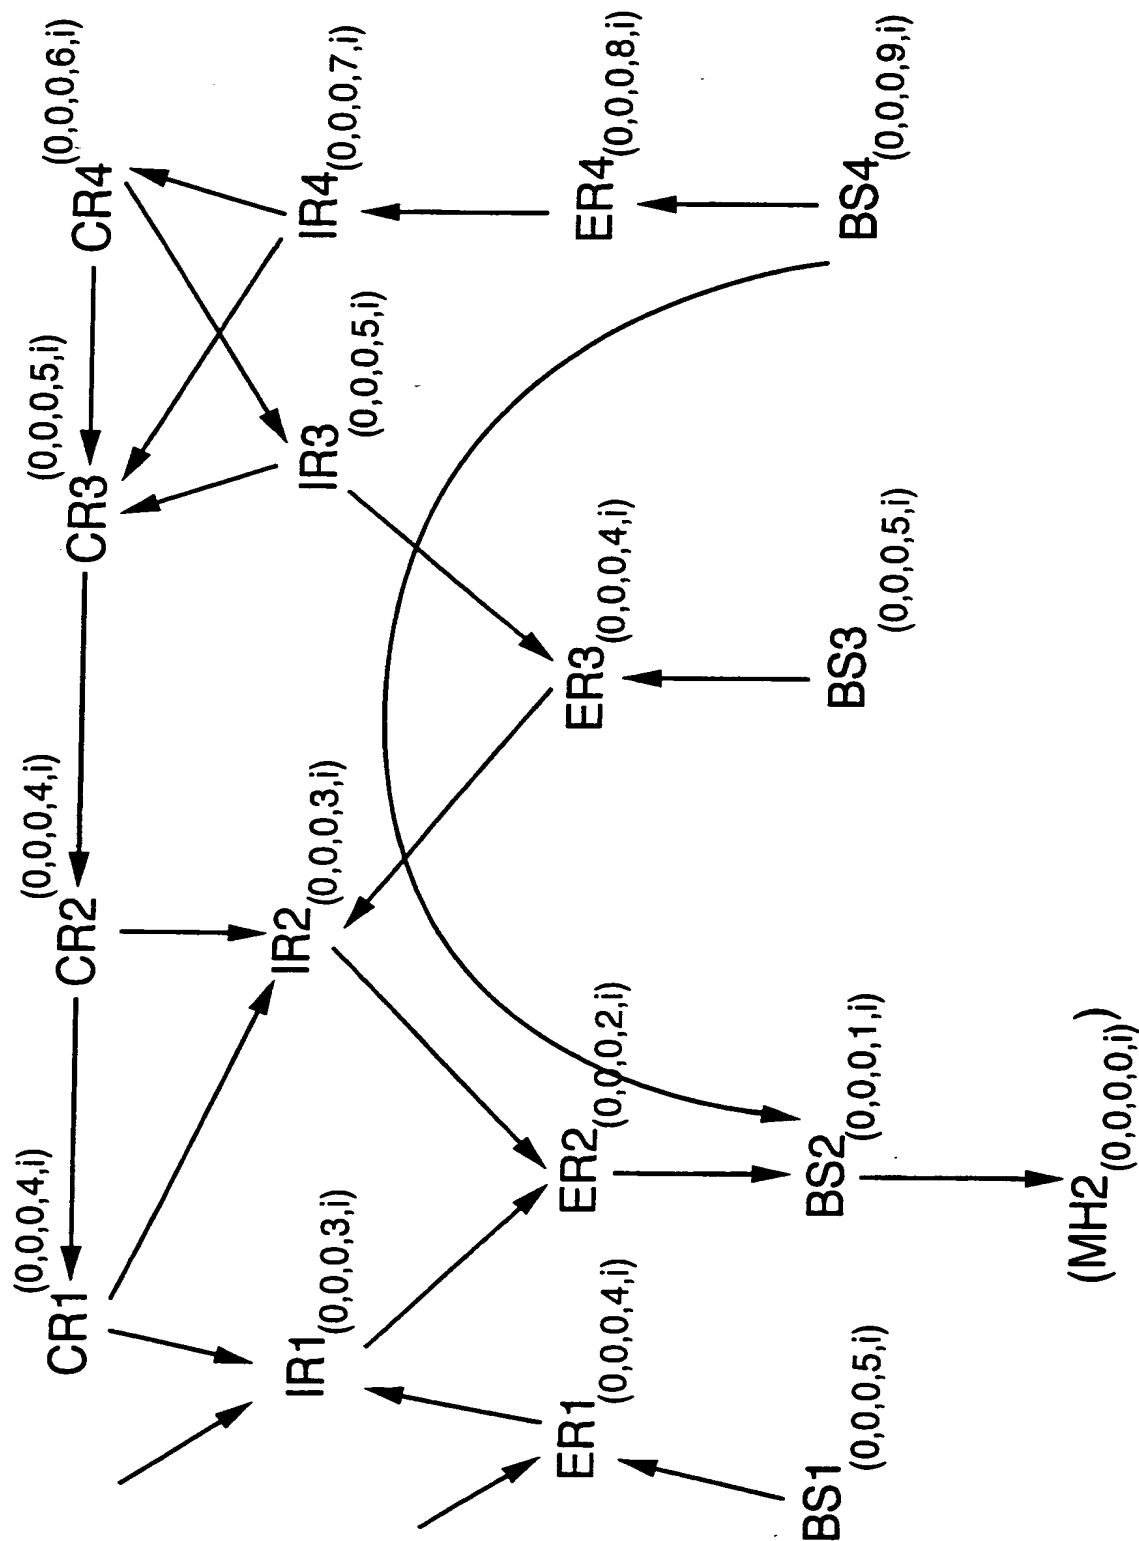

25/26

Fig.25.

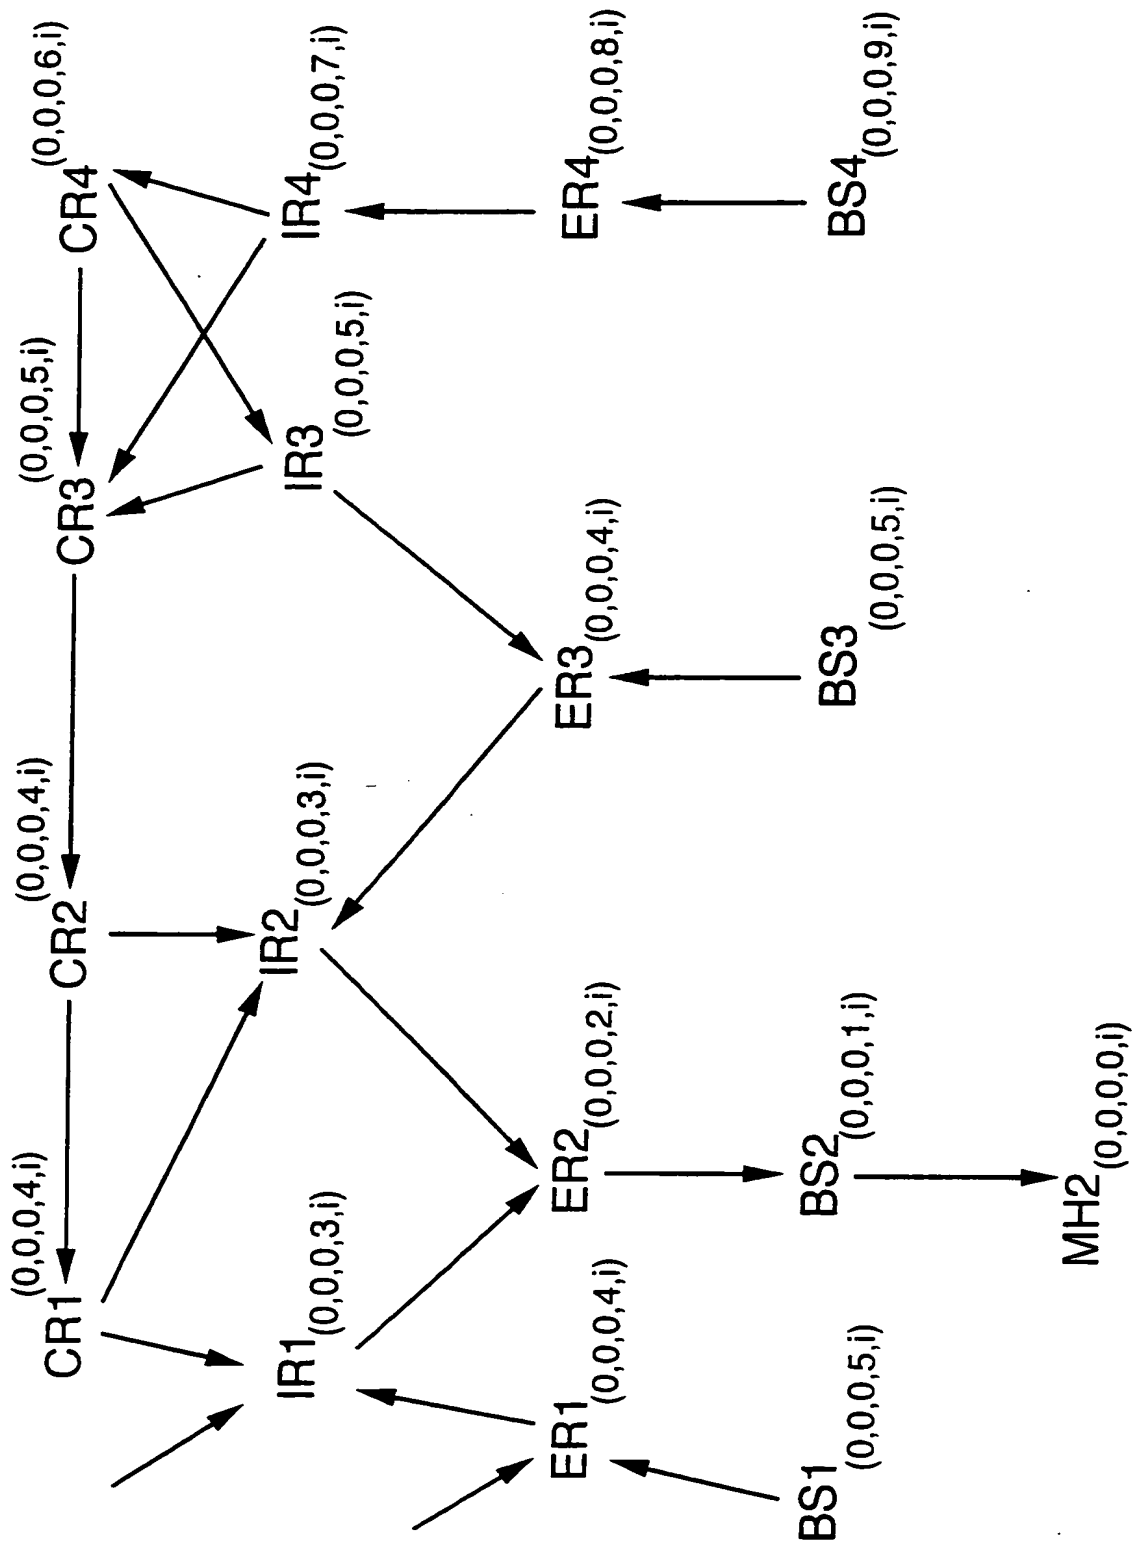



26/26

Fig.26.

Host IP Address (Or Prefix)	Own Height	Neighbour I.D.	Neighbour Height	Link I.D.	Link State
IP1	Hi (IP1)	w	H Niw (IP1)	L1	u
		x	H Nix (IP1)	L2	D
		y	H Niy (IP1)	L3	D
		z	H Niz (IP1)	L4	—
IP2	Hi (IP2)	w	H Niw (IP2)	L1	D
		x	H Nix (IP2)	L2	u
		y	H Niy (IP2)	L3	u
		z	H Niz (IP2)	L4	—
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.

Fig.27.

Host IP Address (Or Prefix)	Link ID
IP1	L2
IP2	L1
⋮	⋮

# INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/GB 00/02769

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04L29/06 H04L12/56

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	COHEN D ET AL: "IP ADDRESSING AND ROUTING IN A LOCAL WIRELESS NETWORK" PROCEEDINGS OF THE CONFERENCE ON COMPUTER COMMUNICATIONS (INFOCOM), US, NEW YORK, IEEE, vol. CONF. 11, page 626-632 XP000300088 ISBN: 0-7803-0602-3 page 0626, right-hand column, paragraph 4 -page 0627, left-hand column, paragraph 2 page 0627, right-hand column, paragraph 4 -page 0628, left-hand column, paragraph 1 page 628, right-hand column, paragraph 5 -page 629, left-hand column, paragraph 2 page 0629, left-hand column, paragraph 4 -right-hand column, paragraph 1 --- -/-	1-6, 8-11, 13
A		7, 12, 14, 20, 22

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

30 November 2000

Date of mailing of the international search report

07/12/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Blanco Cardona, P

# INTERNATIONAL SEARCH REPORT

Int'l. Application No.

PCT/GB 00/02769

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 400 338 A (FLAMMER III GEORGE H) 21 March 1995 (1995-03-21) abstract column 3, line 35 - line 65	15-19, 21,24-26
A	column 4, line 28 - line 57 column 5, line 38 - line 47	20,22,23
A	VALKO A G: "CELLULAR IP: A NEW APPROACH TO INTERNET HOST MOBILITY" COMPUTER COMMUNICATIONS REVIEW,US,ASSOCIATION FOR COMPUTING MACHINERY. NEW YORK, vol. 29, no. 1, page 50-65 XP000823873 ISSN: 0146-4833 page 52, paragraph 3 - paragraph 4 page 55, paragraph 4.1 page 59, paragraph 2 - paragraph 4 page 60, paragraph 5.1	13,24
A	US 5 533 026 A (WETTERWALD MICHELLE M ET AL) 2 July 1996 (1996-07-02) abstract column 1, line 36 -column 2, line 7 column 2, line 38 - line 63 column 4, line 18 -column 5, line 57	15,24,25

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/02769

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5400338 A	21-03-1995	NONE	
US 5533026 A	02-07-1996	AT 197216 T	15-11-2000
		CA 2170786 A	07-09-1996
		CZ 9702656 A	13-05-1998
		DE 69610761 D	30-11-2000
		WO 9627994 A	12-09-1996
		EP 0813800 A	29-12-1997
		HU 9802235 A	28-01-1999
		JP 8274792 A	18-10-1996
		KR 233347 B	01-12-1999
		PL 321754 A	22-12-1997
		RU 2137307 C	10-09-1999